

**SYSTEM ANALYSIS**

**For The**

**Huntsville Operation Support Center  
Distributed Computer System**

**CONTRACT FINAL REPORT**

**June 1986**

**Submitted By:**

**F. M. Ingels, Principal Investigator**

**(NASA-CR-178890) SYSTEM ANALYSIS FOR THE  
HUNTSVILLE OPERATION SUPPORT CENTER  
DISTRIBUTED COMPUTER SYSTEM Final Report  
(Mississippi State Univ., Mississippi  
State.) 115 p**

**N86-32232**

**Unclas  
43512**

**CSCL 12B G3/66**

**Mississippi State University  
Electrical Engineering Department  
Mississippi State, MS 39762  
(601)325-3912**

**Submitted To:**

**NASA MSFC, Alabama  
Technical Monitor: Frank Emmens, EB32  
(205)453-4629**

**NAS8-34906**

**SYSTEM ANALYSIS**

**For The**

**Huntsville Operation Support Center  
Distributed Computer System**

**CONTRACT FINAL REPORT**

June 1986

**Submitted By:**

**F. M. Ingels, Principal Investigator**

**Mississippi State University  
Electrical Engineering Department  
Mississippi State, MS 39762  
(601)325-3912**

**Submitted To:**

**NASA MSFC, Alabama  
Technical Monitor: Frank Emmens, EB32  
(205)453-4629**

**NAS8-34906**

## LIST OF FIGURES

FIGURE	TITLE	PAGE
2.1	A Typical HOSC Activity Configuration . . . .	4
2.2	A Current HOSC Activity Under Heavy Loading . .	10
2.3	A Rerun of Figure 2.2 Reconfigured . . . . .	14
2.4	Anticipated HOSC/CREY Configuration Under Extreme Loading . . . . .	21
2.5	A Rerun of Figure 2.4 with Reduced Loading on one Device . . . . .	25
2.6	Suggested HOSC/CREY Configuration for Extreme Loading . . . . .	29
3.1	Video Terminal Distribution System . . . . .	34

## LIST OF TABLES

TABLE	TITLE	PAGE
2.1	NETWORK STATISTICS FOR FIGURE 2.1 . . . . .	6
2.2	DEVICE STATISTICS FOR FIGURE 2.1 . . . . .	7
2.3	NETWORK STATISTICS FOR FIGURE 2.2 . . . . .	11
2.4	DEVICE STATISTICS FOR FIGURE 2.2 . . . . .	12
2.5	NETWORK STATISTICS FOR FIGURE 2.3 . . . . .	16
2.6	DEVICE STATISTICS FOR FIGURE 2.3 . . . . .	17
2.7	NETWORK STATISTICS FOR FIGURE 2.4 . . . . .	22
2.8	DEVICE STATISTICS FOR FIGURE 2.4 . . . . .	23
2.9	NETWORK STATISTICS FOR FIGURE 2.4 . . . . .	26
2.10	DEVICE STATISTICS FOR FIGURE 2.5 . . . . .	27
2.11	NETWORK STATISTICS FOR FIGURE 2.6 . . . . .	30
2.12	DEVICE STATISTICS FOR FIGURE 2.6 . . . . .	31
3.1	WORST CASE AND STATISTICAL AVERAGE PERFORMANCE ESTIMATES FOR ETHERNET INTERCONNECTION OF VIDEO TERMINAL/VAX 11/730 . . .	41
3.2	SIMULATION RESULTS, NO VIDEO CHANGE REQUESTS . . .	51
3.3	SIMULATION RESULTS WITH VIDEO CHANGE REQUESTS . . .	52
3.4	COMPARISON OF STATISTICAL AND SIMULATION RESULTS.	53

## TABLE OF CONTENTS

SECTION	PAGE
LIST OF FIGURES . . . . .	i
LIST OF TABLES . . . . .	ii
1.0 INTRODUCTION . . . . .	1
2.0 HYPERCHANNEL TRAFFIC ANALYSIS . . . . .	3
2.1 INTRODUCTION . . . . .	3
2.2 A TYPICAL HOSC ACTIVITY CONFIGURATION . . . . .	3
2.3 A CURRENT HOSC ACTIVITY UNDER HEAVY LOADING . . . . .	9
2.4 A RERUN OF FIGURE 2.2 RECONFIGURED . . . . .	13
2.5 ANTICIPATED HOSC/CREY CONFIGURATION UNDER EXTREME LOADING . . . . .	19
2.6 A RERUN OF FIGURE 2.4 WITH REDUCED LOADING ON ONE DEVICE . . . . .	24
2.7 SUGGESTED HOSC/CREY CONFIGURATION FOR EXTREME LOADING . . . . .	28
2.8 CONCLUSIONS . . . . .	32
3.0 ANALYSIS OF VIDEO TERMINAL INTERCONNECT NETWORK . . . . .	33
3.1 INTRODUCTION . . . . .	33
3.1.1 WORST CASE ANALYSIS . . . . .	37
3.2 STATISTICAL ANALYSIS . . . . .	37
3.3 CONCLUSIONS . . . . .	42
3.4 DISCUSSION OF SIMULATION ANALYSIS RESULTS . . . . .	43
3.5 SIMULATION ANALYSIS . . . . .	47
4.0 REFERENCES . . . . .	54
APPENDIX I. BACKUP SIMULATION DATA . . . . .	55

## 1.0 INTRODUCTION

During this contract a simulation model of the NASA Huntsville Operational Support Center (HOSC) was developed. This simulation model emulates the HYPERchannel Local Area Network (LAN) that ties together the various computers of HOSC. The HOSC system is a large installation of mainframe computers such as the Perkin Elmer 3200 series and the Dec VAX series. These computers and a UNIVAC computer are physically located in three buildings separated by hundreds of feet.

In the original concept HOSC was not envisioned to be as large and complex a system as it has become. Lack of existence of a diagnostic tool for the the HYPERchannel such as the EXCELAN Nutcracker for ETHERNET, precludes an actual LAN network simulation prior to missions. Thus the existence of a simulation model with which to make system analysis of various configurations of the computers with varying Input/Output (I/O) requirements is very desirable if not an actual necessity when heavy loading of the systems is projected.

Other work performed during this contract has been the inclusions of dual trunk simulation and additional A400 interfaces to provide CSO, IGDS and other additional system interfaces such as the CREY or DSTP in the simulation model. Additionally an analytical analysis of a projected ETHERNET LAN (to be used to connect a series of Video Terminals (VTs) for addition to the HOSC system) was performed.

Section 2 of this report describes a series of six simulation exercises of the HOSC model using data sets provided by NASA. A

comprehensive report detailing the HOSC simulation model computer code has been submitted as an annual report (reference 1) in July 1985. Section 3.0 of this report contains the analytical analysis of the ETHERNET LAN (see also the December 1984 monthly report) and the VT distribution system which was projected at the time the analysis was requested. This section provides an interface analysis of the smart terminal network model which allows the data flow requirements due to the VTs on the ETHERNET LAN to be estimated.

## 2.0 HYPERCHANNEL TRAFFIC ANALYSIS

### 2.1 INTRODUCTION

This section describes the results of six simulation model exercises conducted for six different HOSC configurations. These configurations vary from typical system connections and I/O traffic requirements to projected systems connections and I/O traffic requirements. The six simulation exercises are enumerated as:

1. A Typical HOSC Activity Configuration
2. A Current HOSC Activity Under Heavy Loading
3. A Rerun of Run 2 with Reconfiguration of Destinations
4. Anticipated HOSC/CREY Configuration Under Extreme Loading
5. A Rerun of Run 4 with Reduced Loading on One Device
6. Suggested HOSC/CREY Configuration for Extreme Loading


Each of the simulation runs is discussed in the following sections.

### 2.2 A TYPICAL HOSC ACTIVITY UNDER HEAVY LOADING

This simulation run was conducted for a typical HOSC configuration with what is considered a heavy I/O data load requirement for the various devices. Figure 2.1 illustrates the system configuration and documents the specific HOSC computers involved in the system.

Inspection of figure 2.1 also reveals the source/destinations connections, the relative probabilities of the source/destination connections, the data generation rates, the data buffer sizes and the device/adaptor I/O rates.



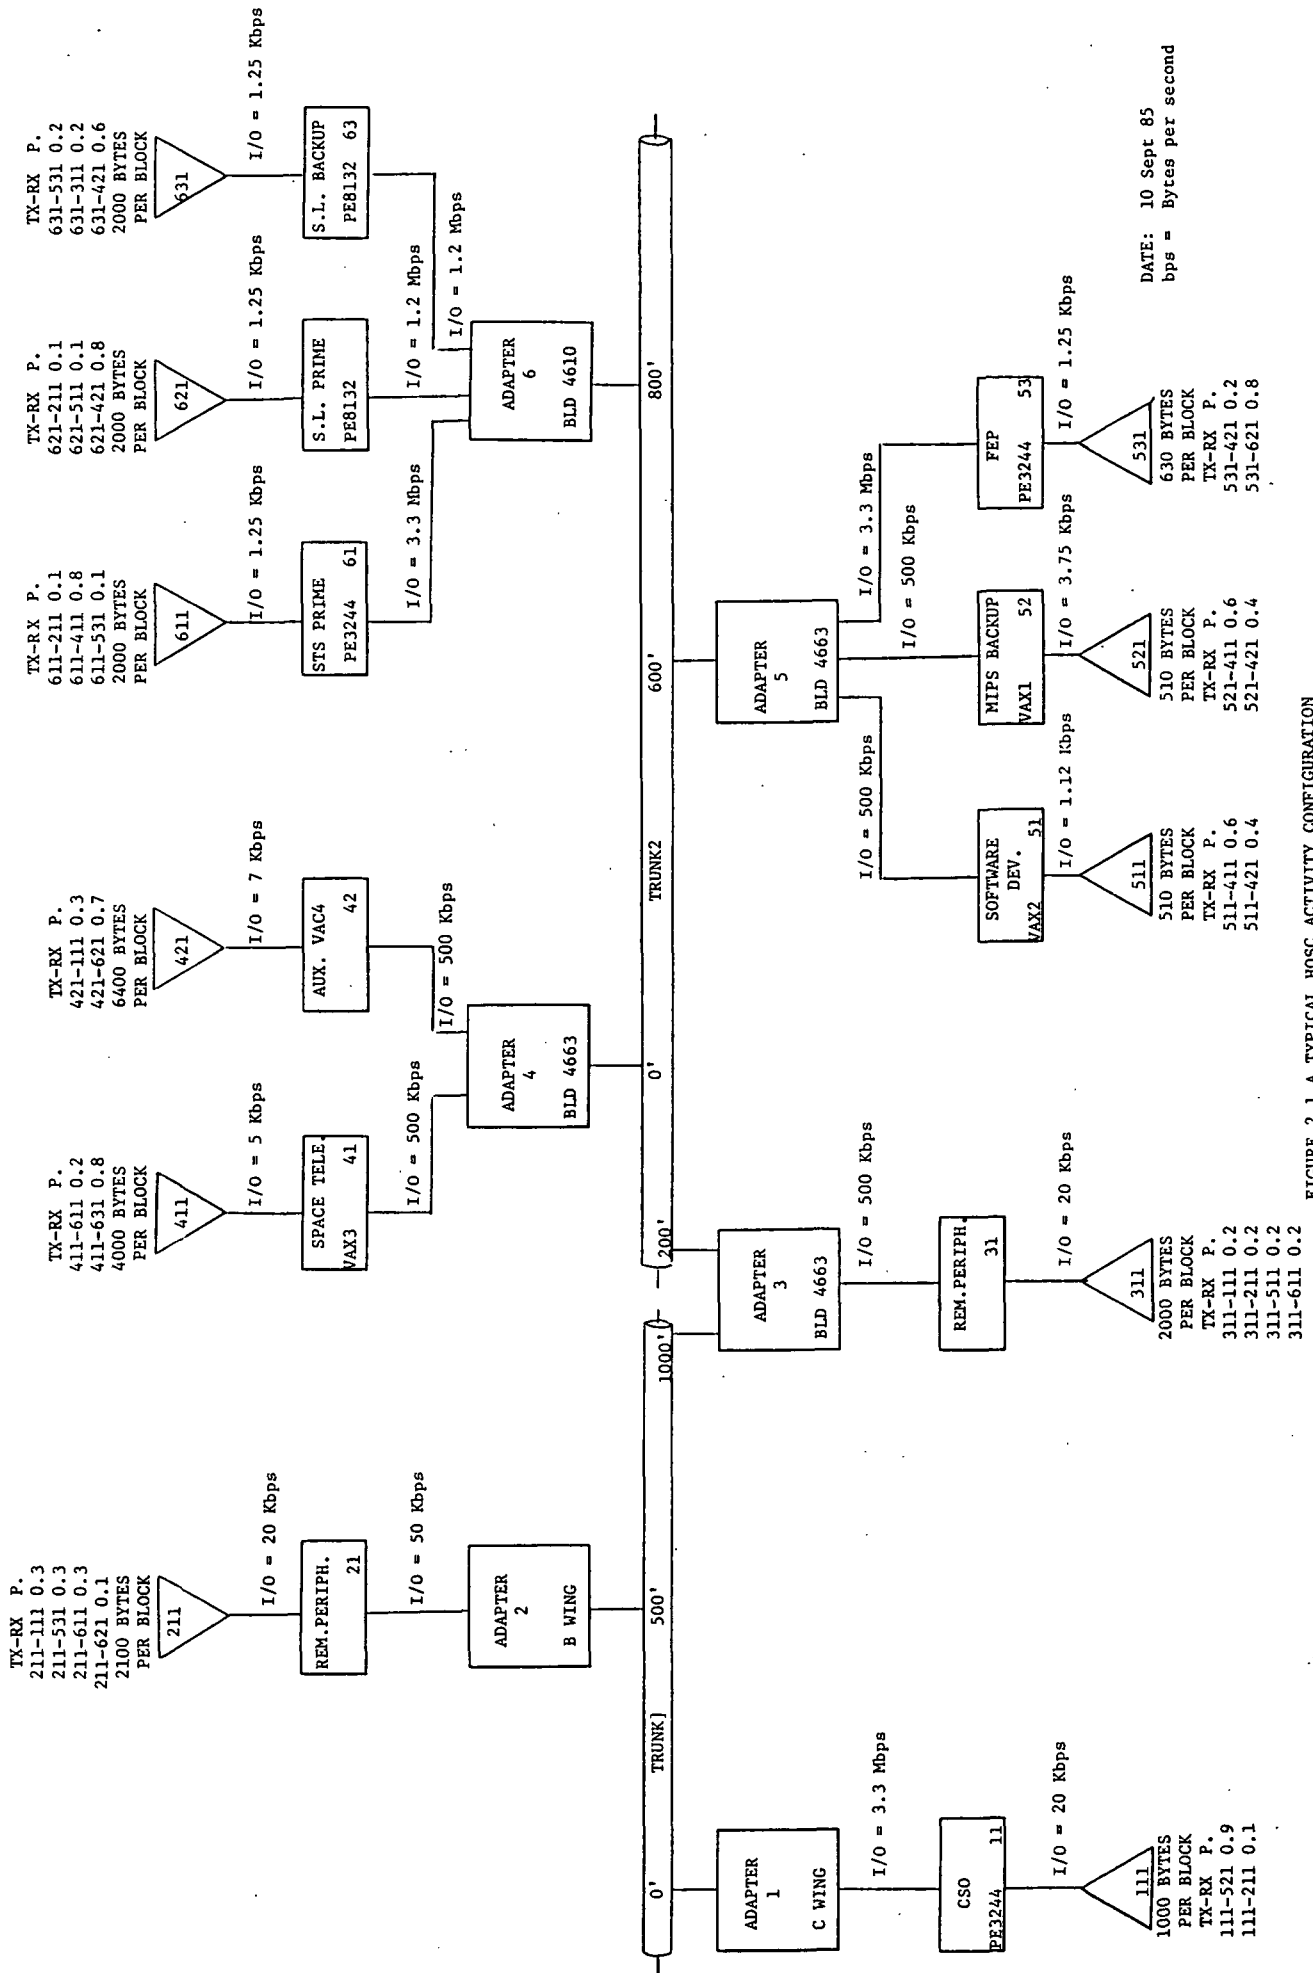

The backup simulation data in Appendix I details the adapter priorities which are assigned each adapter on the trunk, the distances between adapters (noted as fixed delay) and in the case of an adapter common to two trunks lists the trunk priorities on each trunk.

Table 2.1 and 2.2 present the results of the simulation exercise. Table 2.1 presents the overall statistics of the system including the parameters of perhaps greatest interest: total aborts, percent trunk active time and total offered load. Table 2.2 presents the individual device statistics of the network including individual device aborts, collisions, waiting time and average message delay. These device statistics are important in assessing how to reassign devices to the various adapters or trunks in the event that anticipated network performance is not satisfactory in the event that the anticipated network performance is not satisfactory. The network statistics are important in assessing the anticipated network performance.

The results in Table 2.1 indicate that the system is lightly loaded. This may be observed from the trunk active times of 1.848 percent for trunk 1, 1.69 percent for trunk 2. When a trunk activity time of 30 percent or more is incurred the trunk tends to start saturating with regards new data transmissions. Furthermore the collision frequency is low, amounting to 65 collisions out of 638 transmissions for approximately 10 percent collision frequency. Only 110 frames were placed in queue waiting for an opportunity to transmit and only 1 abort was incurred (this by source 411, see Table 2.2). The trunk to trunk transmissions incurred only 24

TABLE 2.1 NETWORK STATISTICS FOR FIGURE 2.1

ADP #	DEV #	SOURCE #	TIME ACTIVE	TIME WAITING	TIME IN COLLISIONS	AVG MESSAGE DELAY	ABORT COUNT	TRANSMISSION COUNT	RECEPTION COUNT	WAIT COUNT	COLLISION COUNT
111	1	1	0.1795	0.0003	1.3E-06	6.9E-04	0	197	98	18	1
211	2	1	0.0924	0.0000	1.3E-06	1.3E-03	0	94	0	0	1
311	3	1	0.1734	0.0006	0.0E+00	7.0E-04	0	201	202	15	0
411	4	1	0.0403	0.0000	1.3E-04	3.5E-03	1	11	54	0	43
421	4	2	0.0333	0.0000	0.0E+00	2.3E-03	0	10	25	0	0
511	5	1	0.0072	0.0003	0.0E+00	5.8E-04	0	24	0	5	0
521	5	2	0.0261	0.0009	0.0E+00	5.8E-04	0	24	197	21	0
531	5	3	0.0196	0.0000	5.3E-07	6.0E-04	0	59	2	0	1
511	6	1	0.0036	0.0000	0.0E+00	8.3E-04	0	6	4	0	0
521	6	2	0.0277	0.0008	5.3E-07	8.5E-04	0	6	49	16	1
631	6	3	0.0235	0.0016	1.3E-04	4.4E-03	0	6	7	32	63

TABLE 2.2 DEVICE STATISTICS FOR FIGURE 2.1

```

*** END OF RUN NETWORK STATISTICS ***

CURRENT TIME :      10.0273 SECS

SUCCESSFUL SEQUENCE TRANSMISSIONS          : 638
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1  : 295
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2  : 343
COLLISIONS (FRAMES)                       : 65
WAITS (FRAMES)                            : 1.1E+02

TOTAL ATTEMPTS (SEQUENCES)                  : 640
TOTAL ABORTS                               : 1
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS        : 225
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS        : 201

TRUNK 1 ACTIVE TIME                        : 0.1852660 SECS
TRUNK 2 ACTIVE TIME                        : 0.1694709 SECS
TOTAL TRUNK ACTIVE TIME                    : 0.3547369 SECS
% TRUNK 1 ACTIVE TIME                      : 1.848 %
% TRUNK 2 ACTIVE TIME                      : 1.690 %
% TOTAL ACTIVE TIME                       : 3.538 %

CONTROL BYTES TRANSMITTED - TRUNK 1        : 4.68994E-01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1           : 6.39584E-01 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2        : 5.52063E-01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2           : 4.67610E-01 MBYTES
TOTAL BYTES TRANSMITTED                    : 2.12825E+00 MBYTES

TOTAL OFFERED LOAD                         : 8.22242E-01 MBYTES

```

collisions for roughly a 10 percent collision rate. Thus the system is operating in a mode in which new offered data will be handled virtually on a one for one basis.

The highest average message delay is 4.4ms (source 631 see Table 2.1) and this is not a significant increase in delay over the system's normal delay of about .6 ms.

The total offered load is approximately 822K Bytes for about 10 seconds or .6576 Mbps.\* This is one tenth the recommended maximum of approximately 6 Mbps offered load for dual trunk systems which was documented in the 1985 Annual Report for this contract (Reference 1, page 109). Note that a load of 16.5 Mbps would correspond to 33% of the 50 Mbps trunk capacity and is the usual upper limit for these types of systems. Note also that a 16.5 Mbps load includes data and control bytes which amount to roughly the same total bytes as data bytes. Thus an offered data load of one half of 16.5 Mbps or 8.25 Mbps would result in a total offered load of 16.5 Mbps.

For the system configuration of Figure 2.1 with the loading shown the offered data loads per trunk are:

Offered data load Trunk 1      is      60KBps = 240 Kbps

Offered data load Trunk 2      is      20.75KBps = 166 Kbps

TOTAL OFFERED DATA LOAD = 406 Kbps.

This amounts to approximately 62% of the total offered load from the simulation exercise. Thus we see that the total offered data loading (406 Kbps) for figure 2.1 is well beneath the recommended upper limit (8.25 Mbps).

---

\*Bps = Bytes Per Second, bps = Bits Per Second.

### 2.3 A CURRENT HOSC ACTIVITY UNDER HEAVY LOADING

Figure 2.2 depicts a current HOSC system configuration under heavy offered data load configurations. Tables 2.3 and 2.4 contain the network statistics and device statistics for the currently operating HOSC system configurations of Figure 2.2.

Inspection of the results in the tables reveal a high number of collisions for a bus with no more activity time than indicated. (18.6% trunk 1, 7.8% trunk 2, 26.5% for both trunks and a total offered load of 640 Kbps.) This collision frequency can be further investigated by inspecting the device statistics in Table 2.4. These indicate that data sources 341 and 441 are the most heavily involved in collisions. From Figure 2.2 the receivers for data sources 341 and 441 are seen to be 441 and 421 respectively.

The data source 341 is tied to device adapter three which is the busiest device on trunk 1. However communications to adapter three's devices is certainly occurring, witness the 924 receptions by source 331 of data from 211. Also 341 does transmit one packet to 441 although 27 aborts are initiated. This indicates that the 341 to 441 link cannot be established. That this is the case may be observed from noting that adapter 4, the cross trunk adapter is heavily loaded as an adapter on trunk 2. In fact adapter 4 receives data from six external data sources and one internal data source as well as being a transmitter of data to six external data sources. Obviously adapter 4 is going to be busy much of the time.

It is also apparent that since source 341 only sends data to 441 it might be sensible to put source 341 on adapter 4 except for the fact that then source 211 would have a very difficult time sending



FIGURE 2.2 A CURRENT HOSC ACTIVITY UNDER HEAVY LOADING

ORIGINAL PAGE IS  
OF POOR QUALITY

TABLE 2.3 NETWORK STATISTICS FOR FIGURE 2.3

```

*** END OF RUN NETWORK STATISTICS ***

CURRENT TIME :      5.0000 SECS

SUCCESSFUL SEQUENCE TRANSMISSIONS      : 1026
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1 : 1022
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2 :      4
COLLISIONS (FRAMES)                   : 1499
WAITS (FRAMES)                         : 4.45E+05
TOTAL ATTEMPTS (SEQUENCES)             : 1121
TOTAL REPTS                            :      94
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS    :      0
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS    :      0

TRUNK 1 ACTIVE TIME                    : 0.2310461 SECS
TRUNK 2 ACTIVE TIME                    : 0.1944174 SECS
TOTAL TRUNK ACTIVE TIME                 : 1.3254635 SECS
% TRUNK 1 ACTIVE TIME                   : 12.621 %
% TRUNK 2 ACTIVE TIME                   : 7.688 %
% TOTAL ACTIVE TIME                     : 26.509 %

CONTROL BYTES TRANSMITTED - TRUNK 1    : 3.57055E+00 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1       : 2.01141E+00 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2    : 2.20184E+00 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2       : 2.25500E-03 MBYTES
TOTAL BYTES TRANSMITTED                 : 7.98606E+00 MBYTES

TOTAL OFFERED LOAD                      : 3.19225E+00 MBYTES

```



TABLE 2.4 DEVICE STATISTICS FOR FIGURE 2.2

ADP #	DEV #	SOURCE #	TIME ACTIVE	TIME WAITING	TIME IN COLLISIONS	AVG MESSAGE DELAY	ABORT COUNT	TRANSMISSION COUNT	RECEPTION COUNT	WAIT COUNT	COLLISION COUNT
111	1	1	0.0793	0.0000	8.5E-05	1.1E-03	0	97	0	0	55
211	2	1	0.6719	0.0040	1.6E-04	1.4E-03	1	924	97	91	279
311	3	1	0.0374	0.0002	1.8E-05	0.0E+00	6	0	0	2	38
312	3	1	0.0255	0.0000	1.2E-05	0.0E+00	4	0	0	0	21
321	3	2	0.0374	0.0000	0.0E+00	0.0E+00	0	0	0	0	0
331	3	3	0.6537	0.0000	0.0E+00	0.0E+00	0	0	924	0	0
341	3	4	0.1726	0.0129	4.3E-05	4.9E-01	27	1	0	255	108
411	4	1	0.0003	4.5E-08	0.0E+00	6.3E-04	0	1	0	91554	0
421	4	2	0.2125	4.5334	0.0E+00	0.0E+00	0	0	1	91702	0
431	4	3	0.0694	4.1336	1.7E-06	0.0E+00	1	0	1	32675	55
441	4	4	0.2929	4.5665	7.1E-03	0.0E+00	13	0	1	91327	1100
442	4	4	0.0004	4.1658	0.0E+00	9.3E-04	0	1	0	93538	0
511	5	1	0.1252	0.0000	1.7E-06	0.0E+00	11	0	1	0	65
521	5	2	0.1123	0.0140	7.9E-06	0.0E+00	11	0	0	705	3
522	5	2	0.0644	0.0000	1.1E-03	2.0E-01	10	1	0	0	145
511	5	1	0.1045	0.0000	8.0E-03	3.4E-01	10	1	1	0	1006

data to source 341. Rather it would appear logical to make the cross trunk adapter (Number 4) one which is not so heavily utilized.

The simulation program does not model the dual trunk system in an exact manner. The program allows only one adapter to be a dual trunk adapter. Although this models the usual case for HOSC it is possible to connect several of the HOSC adapters to two trunks. Another difference is the transfer mechanism. In the real system intra trunk data transfers are accomplished by the transfer of the data to a cross trunk adapter's device for holding. This device then finishes the data transfer when the link between it and the destination is available. The simulation model requires the total link to be available which is a more severe requirement. The simulation results are thus more pessimistic than the real case but is an excellent predictor of system tendencies toward overload.


In this case the decision to make a slight reconfiguration resulted in the system simulation of sections 2.4. As will be noted in section 2.4 the collision rate and abort rate were significantly reduced by a very minor reconfiguration.

#### 2.4 A RERUN OF FIGURE 2.2 RECONFIGURED

In Figure 2.3 a reconfiguration of Figure 2.2 is illustrated. The differences are fairly minor but the results are significant and indicate the dramatic differences of systems performance that can occur with seemingly minor system changes or loading additions. The difference of the configuration of Figure 2.3 from Figure 2.2 are as follows:

Source 331 sends its data to 441 rather than 321

Source 312 sends its data to 611 rather than 421



Source 421 sends its data to 321 rather than 441

Source 441 sends its data to 311 rather than 421

Source 511 sends its data to 211 rather than 521

Source 521 sends its data to 341 rather than 511

Device 61 has I/O rate 1250 Bps rather than .3 Mbps.

The statistical results of (tabulated in Tables 2.5 and Table 2.6) indicate a much lower number of collisions and a much lower number of aborts than the configuration of Figure 2.2. A comparison of the results is given below:

Configuration	Figure 2.2	Figure 2.3
Collisions	1499	55
Aborts	94	2
%Trunk Active Time	26.5%	17.6%
(Both Trunks)		
TOTAL OFFERED LOAD	638 KBps	639 KBps
Successful Transmissions	1026	1751
Transmissions Trunk 1	1022	1663
Transmissions Trunk 2	4	88

This illustrates how small reconfigurations of a system can make a significant difference in system performance. For the same total offered data loads there is a significant reduction in the trunk activity time and the number of successful transmissions rises sharply. The maximum coverage message delay time (Table 2.4, source 341) of .49 seconds was reduced to .24 milliseconds (Table 2.6, source 522) and the trunk-to-trunk transmissions were significantly increased.

TABLE 2.5 NETWORK STATISTICS FOR FIGURE 2.3

\*\*\* END OF RUN NETWORK STATISTICS \*\*\*

```

CURRENT TIME :      5.0025 SECS

SUCCESSFUL SEQUENCE TRANSMISSIONS      : 1751
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1 : 1503
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2 : 28
COLLISIONS (FRAMES)                   : 55
WAITS (FRAMES)                        : 1.25E+03
TOTAL ATTEMPTS (SEQUENCES)             : 1754
TOTAL ATTEMPTS                         : 2
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS    : 492
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS    : 19

TRUNK 1 ACTIVE TIME                   : 0.0343533 SECS
TRUNK 2 ACTIVE TIME                   : 0.0375456 SECS
TOTAL TRUNK ACTIVE TIME               : 0.0718989 SECS
% TRUNK 1 ACTIVE TIME                 : 15.679 %
% TRUNK 2 ACTIVE TIME                 : 0.751 %
% TOTAL ACTIVE TIME                   : 17.429 %

CONTROL BYTES TRANSMITTED - TRUNK 1   : 2.34199E+09 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1      : 2.79893E+00 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2   : 1.71519E-01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2      : 5.16E-02 MBYTES
TOTAL BYTES TRANSMITTED               : 5.36407E+03 MBYTES

TOTAL OFFERED LOAD                    : 3.19960E+00 MBYTES

```

ORIGINAL PAGE IS  
OF POOR QUALITY

TABLE 2.6 DEVICE STATISTICS FOR FIGURE 2.3

ADP DEV SOURCE # # #	TIME ACTIVE	TIME WAITING	TIME IN COLLISIONS	AVG MESSAGE DELAY	ABORT COUNT	TRANSMISSION COUNT	RECEPTION COUNT	WAIT COUNT	COLLISION COUNT
111	1 1 1	0.0371	0.0000	7.4E-04	0	98	0	0	5
211	1 1 1	0.5906	0.0077	3.3E-04	0	1040	104	151	50
311	1 1 1	0.1922	0.0004	5.5E-04	0	6	463	8	1
312	1 2 1	0.0015	0.0000	6.6E-04	0	4	0	0	1
321	2 1 1	0.0020	0.0000	0.0E+00	0	0	6	0	0
331	3 1 1	0.5316	0.0000	0.0E+00	0	0	1040	0	0
341	4 1 1	0.0144	0.0033	6.7E-04	0	31	9	72	1
411	1 1 1	0.0065	0.0028	1.3E-03	0	23	0	57	1
421	2 1 1	0.0087	0.0004	7.1E-04	0	11	12	7	1
431	3 1 1	0.0078	0.0206	6.3E-04	0	11	10	435	0
441	4 1 1	0.1955	0.0197	7.9E-04	0	463	43	363	44
442	4 4 2	0.0190	0.0013	7.2E-04	0	21	19	27	1
511	5 1 1	0.0124	0.0000	3.7E-04	0	11	28	0	1
521	5 2 1	0.0095	0.0022	2.2E-03	1	10	0	42	0
522	5 2 2	0.0073	0.0028	2.4E-03	1	10	11	61	1
611	6 1 1	0.0076	0.0000	8.2E-04	0	12	6	0	3

This type of study can be used to determine in advance the probable worst case system performance limitations and gives one an opportunity to try ''in the laboratory'' various reconfigurations in a search for an optimum system performance configuration.

## 2.5 ANTICIPATED HOSC/CREY CONFIGURATION UNDER EXTREME LOADING

The system configuration illustrated in Figure 2.4 is an anticipated configuration including an outside computer link called the CREY. The CREY link is anticipated to feed data to HOSC and to require some communications from HOSC to the CREY facility. The configuration of Figure 2.4 is a suggested manner in which to tie together the CREY facility and the HOSC facility and yet provide a means for isolating HOSC from unwarranted demands by the CREY facility during missions support by HOSC.

It should be noted that this configuration has added an extra adapter in relation to the configurations of Figure 2.3. This extra adapter has a twofold purpose, one is to help relieve adapter 3 loading by moving SSME to adapter 4 and to provide an adapter as a tie link through which CREY interfaces to HOSC.

Tables 2.7 and 2.8 contain the simulation results. It may be observed that there a significant number of aborts (48) and a high number of collisions (3901) in a 10 second simulation period. Also the offered load is 1.958MBps (15.664Mbps) which is quite high compared to the recommended limit of 1.031MBps (8.25Mbps) and the trunk active times are over 50%. This indicates that the system is not performing satisfactorily under this configuration. One data source is running with a 1.3 MBps data operation rate which is extreme. This was an arbitrarily chosen figure which evolved during discussions with NASA personnel. A rerun of this configuration with a reduced data generation rate is contained in the next section.



Because this system performance is not judged satisfactory a suggested reconfiguration for the HOSC/CREY system is presented in Section 2.7.

21



TABLE 2.7 NETWORK STATISTICS FOR FIGURE 2.4

```

*** END OF RUN NETWORK STATISTICS ***

CURRENT TIME :      10.0000 SECS

SUCCESSFUL SEQUENCE TRANSMISSIONS                : 4940
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1        : 4771
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2        : 169
COLLISIONS (FRAMES)                             : 3901
WAITS (FRAMES)                                   : 3.6E+04
TOTAL ATTEMPTS (SEQUENCES)                       : 5424
TOTAL ABORTS                                     : 480
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS              : 4404
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS              : 32

TRUNK 1 ACTIVE TIME                             : 5.668979 SECS
TRUNK 2 ACTIVE TIME                             : 0.2184609 SECS
TOTAL TRUNK ACTIVE TIME                         : 5.8873588 SECS
X TRUNK 1 ACTIVE TIME                           : 56.689 X
X TRUNK 2 ACTIVE TIME                           : 2.185 X
X TOTAL ACTIVE TIME                             : 58.874 X

CONTROL BYTES TRANSMITTED - TRUNK 1              : 2.90019E+01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1                 : 5.76584E+00 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2              : 1.13755E+00 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2                 : 9.83160E-02 MBYTES
TOTAL BYTES TRANSMITTED                         : 3.60036E+01 MBYTES

TOTAL OFFERED LOAD                               : 1.95835E+01 MBYTES

```

TABLE 2.8 DEVICE STATISTICS FOR FIGURE 2.4

ADP #	DEV #	SOURCE #	TIME ACTIVE	TIME WAITING	TIME IN COLLISIONS	AVG MESSAGE DELAY	ABORT COUNT	TRANSMISSION COUNT	RECEPTION COUNT	WAIT COUNT	COLLISION COUNT
111	1	1	0.1104	0.0000	5.3E-04	1.1E-02	0	165	0	0	374
211	2	1	1.2541	0.0062	2.7E-04	9.5E-03	100	709	174	136	365
	1	1	2.7786	0.2420	1.4E-04	2.0E-03	160	3468	0	4868	319
312	3	1	0.0072	0.0000	5.3E-07	6.2E-03	3	6	0	0	2
321	3	2	0.0259	0.0000	0.0E+00	0.0E+00	0	0	14	1	0
331	3	3	0.1118	0.2333	1.5E-05	5.1E-03	6	53	16	4725	46
411	4	1	2.5191	0.0000	0.0E+00	0.0E+00	0	0	1040	0	0
421	4	2	0.2170	0.0047	1.5E-05	0.0E+00	34	0	0	92	37
511	5	1	0.0154	0.4432	5.0E-05	9.4E-04	0	45	0	8807	46
521	5	2	0.0775	0.3414	2.5E-04	5.7E-03	2	20	23	6887	73
531	5	3	0.0675	0.2289	5.1E-04	2.0E-03	0	23	19	4605	86
541	5	4	4.1397	0.2117	1.5E-02	1.5E-02	154	331	3528	4233	2117
542	5	4	0.1122	0.0313	5.4E-03	1.0E-02	10	37	40	611	735
611	6	1	0.0552	0.0154	1.6E-03	6.4E-03	2	21	51	309	205
621	6	2	0.0353	0.0004	2.5E-04	5.2E-03	3	20	0	6	34
622	6	2	0.0675	0.0380	1.9E-03	1.2E-02	5	19	23	778	275
711	7	1	0.0370	0.0000	2.1E-02	1.3E-02	1	23	12	0	2650

## 2.6 A RERUN OF FIGURE 2.4 WITH REDUCED LOADING ON ONE DEVICE

Figure 2.5 illustrates the configuration of Figure 2.4 but with the data generation rate of source 311 reduced from 1.3 MBps to a more reasonable 1.3 KBps. The results as indicated in Tables 2.9 and 2.10 show a reduction in trunk activity from over 50% to 33% which is judged to be an upper operating limit (see reference 1, pages 93-97 for discussion), the collision rate is down from 3901 to 1804 and the aborts are down from 480 to 320. The new offered load is 659 KBps and is reasonable.

This configuration could still be improved, however. The device statistics (Table 2.10) show that adapter 5 is responsible for most of the congestion. Since 5 is loaded with two devices talking to adapter 6 only, it seems prudent to remove those devices from adapter 5 and connect them to adapter 7 to balance the load and to free adapter 5 for trunk to trunk transmission. Section 2.7 contains the results of this reconfiguration.




TABLE 2.9 NETWORK STATISTICS FOR FIGURE 2.5

```

*** END OF RUN NETWORK STATISTICS ***

CURRENT TIME :      10.0000 SECS

SUCCESSFUL SEQUENCE TRANSMISSIONS :      2299
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1 :      2129
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2 :      169
COLLISIONS (FRAMES) :      1204
WAITS (FRAMES) :      1.1E+04
TOTAL ATTEMPTS (SEQUENCES) :      2612
TOTAL A-PORTS :      312
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS :      4334
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS :      37

TRUNK 1 ACTIVE TIME :      3.1655554 SECS
TRUNK 2 ACTIVE TIME :      0.1993149 SECS
TOTAL TRUNK ACTIVE TIME :      3.3550703 SECS
% TRUNK 1 ACTIVE TIME :      31.456 %
% TRUNK 2 ACTIVE TIME :      1.895 %
% TOTAL ACTIVE TIME :      33.351 %

CONTROL BYTES TRANSMITTED - TRUNK 1 :      1.58485E+01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1 :      3.50225E+00 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2 :      1.03773E+00 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2 :      2.93160E-02 MBYTES
TOTAL BYTES TRANSMITTED :      2.04488E+01 MBYTES

TOTAL OFFERED LOAD :      6.59650E+00 MBYTES

```

DEVICE ACTIVITY SUMMARIES

ORIGINAL PAGE IS  
OF POOR QUALITY

TABLE 2.10 DEVICE STATISTICS FOR FIGURE 2.5

ADP DEV SOURCE # 1 2 3 4 5 6 7	TIME ACTIVE	TIME WAITING	TIME IN COLLISIONS	AVG MESSAGE DELAY	ABORT COUNT	TRANSMISSION COUNT	RECEPTION COUNT	WAIT COUNT	COLLISION COUNT
111	1 1 1	0.1397	0.0000	9.3E-04	5.6E-03	0	179	0	595
211	2 1 1	1.6373	0.0021	3.6E-04	3.6E-03	118	1260	46	493
311	3 1 1	0.0141	0.0000	3.5E-03	1	11	0	0	0
312	3 1 2	0.0062	0.0000	2.4E-03	0	9	0	0	0
321	3 2 1	0.0056	0.0000	0.0E+00	0	0	18	0	0
331	3 3 1	0.0344	0.0000	1.3E-04	4.2E-03	1	59	0	5
411	4 1 1	2.8957	0.0000	0.0E+00	0	0	1825	0	0
421	4 2 1	0.3700	0.0033	7.3E-04	0.0E+00	59	0	45	15
511	5 1 1	0.0209	0.1857	5.1E-04	1.5E-03	1	45	0	109
521	5 2 1	0.0322	0.0591	1.4E-05	3.3E-03	1	22	1163	124
531	5 3 1	0.0437	0.0324	9.0E-06	2.5E-03	1	22	1645	95
541	5 4 1	1.1193	0.1166	1.7E-03	5.4E-03	119	565	2273	464
542	5 4 2	0.0891	0.0710	1.4E-04	1.9E-03	1	40	1412	23
611	6 1 1	0.3709	0.0000	3.6E-06	7.3E-03	4	19	0	137
621	6 2 1	0.0434	0.0335	2.2E-06	7.3E-03	3	20	670	93
622	6 2 2	0.0465	0.0000	4.7E-03	6.4E-03	1	23	0	594
711	7 1 1	0.0242	0.0000	6.3E-03	9.3E-03	0	24	0	797



## 2.7 SUGGESTED HOSC/CREY CONFIGURATION FOR EXTREME LOADING

Figure 2.6 illustrates a suggested reconfiguration of the HOSC/CREY system for operation under heavy loading. The two devices formerly attached to adapter 5 which conversed with adapter 6 have been moved to adapter 7. This may be awkward if adapter 7 is in a different building but one could reconfigure the two devices from adapter 5 to adapter 6 itself since adapter 6 is in the same building as adapter 5. Another approach would be to add another adapter to the system. Any of these approaches would relieve the cross trunk adapter of some of its congestion.

The results of the simulation run for figure 2.6 shows a marked improvement due to the reconfiguration. The numbered collisions are down from 1804 to 195, the number of frames which had to wait for a transmission time has dropped by an order of magnitude and the number of aborts has dropped from 310 to 1. Further inspection and comparisons of Table 2.11 and Table 2.9 reveals that the trunk busy time has been reduced from a total of 33.55% to 19.935% while the number of data bytes transmitted has actually increased on trunk 1 by 67% and by 7% increase on trunk 2.

THIS SIMULATION RUN ILLUSTRATES THE BENEFITS THAT CAN BE ACHIEVED BY SIMULATION OF A PROPOSED CONFIGURATION, INSPECTION OF THE RESULTS AND PERFORMING A RECONFIGURATION IF DESIRABLE.

[illegible]

FIGURE 2.6 SUGGESTED HOSC/CREY CONFIGURATION FOR EXTREME LOADING

TABLE 2.11 NETWORK STATISTICS FOR FIGURE 2.6

```

*** END OF RUN NETWORK STATISTICS ***

CURRENT TIME :      10.0000 SECS

SUCCESSFUL SEQUENCE TRANSMISSIONS          : 444
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1 : 4265
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2 : 161
COLLISIONS (FRAMES)                       : 195
WAITS (FRAMES)                            : 3.2E+03
TOTAL ATTEMPTS (SEQUENCES)                 : 4449
TOTAL ABORTS                               : 1
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS       : 151
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS      : 45

TRUNK 1 ACTIVE TIME                       : 1.9128248 SECS
TRUNK 2 ACTIVE TIME                       : 0.0505966 SECS
TOTAL TRUNK ACTIVE TIME                   : 1.9935214 SECS
% TRUNK 1 ACTIVE TIME                     : 19.123 %
% TRUNK 2 ACTIVE TIME                     : 0.807 %
% TOTAL ACTIVE TIME                       : 19.935 %

CONTROL BYTES TRANSMITTED - TRUNK 1      : 6.02326E+00 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1         : 5.79952E+00 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2      : 3.14394E-01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2         : 1.06594E-01 MBYTES
TOTAL BYTES TRANSMITTED                   : 1.22439E+01 MBYTES

TOTAL OFFERED LOAD                        : 6.59650E+00 MBYTES

```

DEVICE ACTIVITY SUMMARIES  
(SECONDS)

TABLE 2.12 DEVICE STATISTICS FOR FIGURE 2.6

OF DEV SOURCE # #	TIME ACTIVE	TIME WAITING	TIME IN COLLISIONS	AVG MESSAGE DELAY	ABORT COUNT	TRANSMISSION COUNT	RECEPTION COUNT	WAIT COUNT	COLLISION COUNT
1 1 1 0.0740	0.0000	5.9E-05	7.3E-04	0	197	0	0	0	6
2 1 1 1.2047	0.0049	9.1E-06	8.6E-04	0	2069	214	90	13	
3 1 1 0.0045	0.0033	0.0E+00	7.7E-04	0	12	0	6	0	
4 1 2 0.0034	0.0000	2.6E-07	7.3E-04	0	9	0	0	1	
5 2 1 0.0592	0.0000	0.0E+00	0.0E+00	0	0	114	0	0	
6 3 1 0.0234	0.0000	1.3E-07	7.9E-04	0	62	19	0	1	
7 1 1 1.7296	0.0000	0.0E+00	0.0E+00	0	0	3535	0	0	
8 2 1 0.0521	0.0189	3.6E-06	5.2E-04	0	99	0	390	11	
9 1 1 0.0222	0.0035	1.0E-03	2.0E-03	1	22	24	65	132	
10 2 1 0.5466	0.0356	3.4E-05	6.7E-04	0	1766	82	729	22	
11 2 2 0.0321	0.0322	1.5E-04	8.4E-04	0	46	47	539	22	
12 1 1 0.0345	0.0009	2.4E-05	2.0E-03	0	23	54	19	4	
13 2 1 0.0069	0.0316	2.4E-05	7.7E-04	0	23	0	515	3	
14 2 2 0.0225	0.0000	3.2E-05	7.7E-04	0	24	23	0	4	
15 1 1 0.0133	0.0000	4.0E-05	7.4E-04	0	24	10	0	5	
16 2 1 0.0167	0.0334	5.4E-05	7.2E-04	0	47	0	679	3	31
17 3 1 0.0225	0.0000	1.2E-03	2.2E-03	0	23	24	0	157	

ORIGINAL PAGE IS  
OF POOR QUALITY

## 2.8 CONCLUSIONS

The dual trunk HOSC simulation model which has been developed for NASA has been exercised for six scenarios ranging from a typical but lightly loaded HSOC configuration to a severely loaded HOSC/CREY configuration. Analysis of the network and device statistics have shown where potential problems may develop.

The simulation results of the HOSC/CREY configuration which has been proposed by NASA indicates a bottle neck in the trunk-to-trunk data flow and a suggested reconfiguration has been run. These results indicate that a much smoother operation is possible with reconfiguration while still allowing isolation from the CREY input through use of an adapter for controlling the CREY data inputs.

The simulation model has been shown to be a very valuable tool for predicting possible problems with envisioned HOSC configurations, additions, etc. It is recommended that every newly envisioned HOSC configuration with added data flow requirements be simulated to the best ability with this model and potential trouble spots identified before planning has progressed to the purchase and installation of equipment or software.


### 3.0 ANALYSIS OF VIDEO TERMINAL NETWORK INTERCONNECT NETWORK

#### 3.1 INTRODUCTION

The system depicted in Figure 3.1 is a proposed Video Terminal interconnect network. The Space Telescope data link which is received at HOSC is decommutated and an ensemble of decommutated channels with an aggregate of 2 Mbps (250KBps) is delivered to the combination of a VAX 11/780 and a PE3254 computer set as envisioned by NASA HOSC personnel in 1984. These two computers accept the Space Telescope data, perform changes to place the data in proper format for the Video Terminals, perform data calculations to compute new parameters, perform data unit conversions and extrapolate data tendencies. The PE3254 is the main computational tool for data calculations while the VAX 11/780 is the main computational tool for data format changes.

These two computers serve as data sources for the 80 video Terminals which are connected by a Local Area Network (LAN) to the VAX 11/780 and PE3254 by 10 VAX 11/730 computers each of which can handle up to 8 Video Terminals each.

Data I/O rates are constrained to a large extent by the internal data buses of the computers which must serve as I/O buses as well as data buses for internal disk and file transfers. Thus, the VAX 11/730, for instance, which has 1 UNIBUS with 1.5MBps data transfer rate is required to handle input data flow, output data flow as well as disk and file and DMA data transfers. The effective data transfer rate for the I/O functions is estimated to be approximately 300KBps due to this multifunction requirement placed on the UNIBUS (Reference 2).

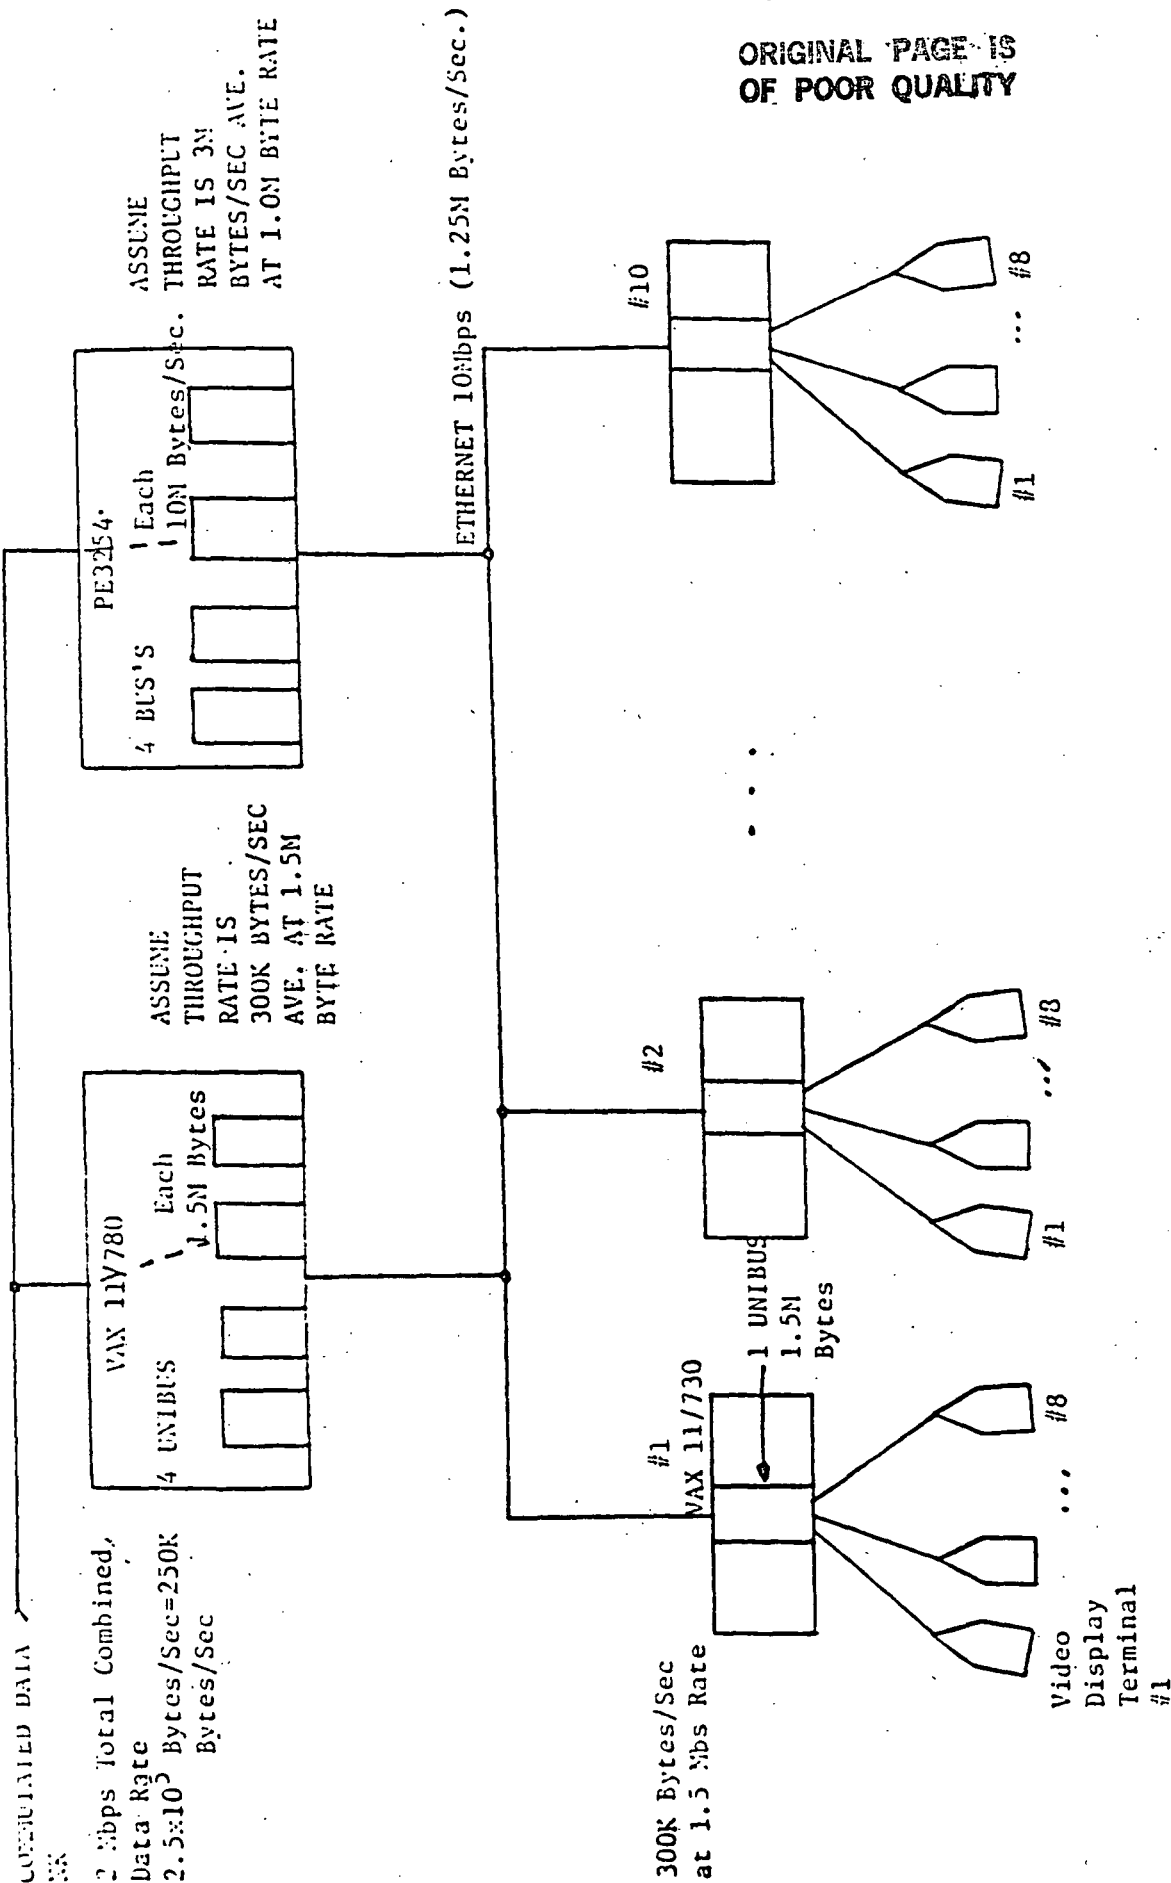

1. 1920 Bytes (24 Linesx80 Bytes/Line) To Fill Screen
2. 11/730 Refreshes the screen every 5 seconds (comes from 11/780 + PE3254) Sequentially through the 8.
3. When terminal requests screen format change, the request is relayed to 11/730, Then to 11/780 or PE3254 which then finds/calculates and sends down data to terminal.
4. Assume packet lengths 128 or 256 or 512 Bytes/Packets.
5. Assume terminal requests update or format change every 3 minutes.

Figure 3.1. Video Terminal Distribution System

Thus, although the data is actually transferred over the UNIBUS at 1.5MBps, the waiting to gain access for UNIBUS use yields a data throughput analogous to a slower speed bus of 300KBps rate which is instantly available.

The VAX 11/780 has 4 UNIBUS's each with 1.5MBps speed, but only 1 of these is assigned to provide I/O for the Space Telescope/Video Terminal usage. Hence, the equivalent I/O rate is once again estimated to be 300KBps.

The PE3254 has four 10MBps buses, but only one is assigned to Space Telescope I/O and hence after degrading due to other required functions for the bus, the equivalent data transfer rate is estimated to be 3MBps (Reference 2).

To determine a worst case waiting time for a screen change request, the system may be assumed to be in the following condition:

1. Assume all screens are currently in use with 1920 Bytes of refresh data every 5 seconds being transmitted from VAX 11/780 and PE3254 to the screens via ETHERNET and the VAX 11/730 computers.
2. Assume all screen operators simultaneously request a screen change which requires a new set of 1920 Bytes to be sent for each screen.

The data requirements for the ETHERNET channel will be two complete sets of 1920 Bytes per Video Terminal, or a total of 37,200 bytes plus the number of bytes required to request the screen change. Assuming that a screen change can be accomplished in 50 bytes of information, that increases the total channel requirement by 4000 bytes for a total of 311,200 bytes.



The ETHERNET channel can transmit data at a 10Mbps rate or 1.25Mbps rate. Hence, the channel itself with no collisions would require .249 seconds to transmit this data set. Assuming 10% collisions which require another 20% more data to be sent the total time could easily approach .324 seconds to effect the total data transfer. However, the host computers cannot accomplish this data rate.

The VAX 11/730 sequentially services the Video Terminals and the I/O rate is essentially 1/2 the effective rate of 300K Bytes per second of the UNIBUS in a one way direction. The actual data flow, however, is two way with the screen change request bytes flowing outward. The interchange is effectively 1920 bytes in, 50 bytes out 1920 bytes in again, interspersed with the other Host requirements on the UNIBUS.

If the VAX 11/780 is assumed to transfer all the data for screen update (which is a worst case situation since the PE3254 is faster), then the fastest transfer of the total data which can be achieved is 311,200 bytes at 300KBps byte rate or a 1.04 second time period. Because the ETHERNET channel is idle during much of the time waiting for the VAX 11/780 to output data, the ETHERNET channel will not be a factor in the total time to transfer the data. Furthermore, the VAX 11/730 hosts are only trying to transfer 31,120 total bytes each. Thus, they are waiting for their time to communicate with the VAX 11/780 as the VAX 11/780 can get to them.

The upshot of the above discussion is the illustration of the fact that the VAX 11/780 will be the major limiting factor in the

data transfer. Assuming 10% collisions on the ETHERNET channel, the total time to transfer the data would be approximately 1.352 seconds.

### 3.1.1 WORST CASE ANALYSIS

The above assumes 1920 Bytes/packet and that all screen change requests occur after the next screen refresh. In actuality, some screen change requests will be received at the VAX 11/780 before the screen refresh and eliminate the need for the transfer of the 1920 bytes of screen refresh data for the old screen; then the total number of bytes required is only 234,400 and the time for total screen change including 10% collisions would be 1.016 seconds.

Now assuming the data is packaged in 512 Bytes per packet, it will require 4 packets for each 1920 Bytes and 1 packet for screen change request. Thus, the total packet count to be transmitted is  $4 \times 2 \times 80 + 80 = 720$  packets. Each packet requires 1.71ms to be transmitted. (Assuming each packet is transmitted at an average of 300,000 bytes per second). This means the VAX 11/780 and VAX 11/730's need to gain the channel access 720 times. The VAX 11/780 will need 720 times 1.71ms or 1.23 seconds to send the data (no collisions) (remembering one full packet is now used for only 50 bytes of screen change request data) as opposed to the previous no collision time of .249 seconds.

### 3.2 STATISTICAL ANALYSIS

The article of Reference 3 presents a "'slotted'" ETHERNET Model which is useful for an analysis of waiting time, bus efficiency

and acquisition probability since the ETHERNET listens before talking and in essence waits one slot time before trying to transmit.

Let  $P$  = the number of bits in an ETHERNET packet.

Let  $C$  = the peak capacity in bits per second carried on the ETHERNET.

Let  $T$  = the time in seconds of a slot duration.

Let  $Q$  = the number of stations continuously queued to transmit a packet.  $Q$  is, therefore, the total offered load on the network ( $\geq 1$ ).

It is assumed that a queued station attempts to transmit in the currently available slot with probability  $1/Q$  and delays the attempt with probability  $(1 - 1/Q)$ .

The probability,  $A$ , that exactly one station attempts a transmission in a slot and, therefore, acquires the ETHERNET channel is

$$A = Q(1/Q)(1 - 1/Q)^{Q-1} ,$$

since there are  $Q$  stations that can try for the channel access with probability  $1/Q$  and the remaining  $1-Q$  channels choose to wait with probability  $(1-Q)$  each.

The waiting time,  $W$ , is the average (mean) number of channel slots of waiting in a contention interval before a successful acquisition of the channel by a station.

The probability of no waiting is  $A$ . The probability of waiting one slot is  $A(1-A)$ . The probability of waiting  $i$  slots is  $A(1-A)^i$ . The mean of this geometric distribution is:

$$W = (1-A)/A.$$

For 10 users on a channel (10 VAX 11/730's).

$$A = (1-1/Q)^{Q-1} = (.9)^9 = .3874$$

or 38.74% of the time a station's attempt to gain channel access is successful on the first try.

The mean waiting time is

$$W = (1-A)/A = (1- .3874)/(.3874) = 1.58,$$

or a station waits an average of 1.58 attempts before gaining a channel when it is trying to transmit.

The efficiency  $e$  is the fraction of time the ETHERNET channel is carrying good packets. The ETHERNET channel's time is divided between transmission intervals and contention intervals.

For most operations, including the HOSC application, this is a worst case analysis by far. Most applications do not utilize the bus continuously which is the assumption here. Furthermore when the bus is idle, the first station to request the channel gains the channel with no waiting.

To continue the analysis a packet transmission takes  $P/C$  seconds and the mean time to acquisition is  $WT$ . Hence, this simple worst case analysis yields an estimate of the efficiency as

$$E = (P/C)/((P/C) + WT) ,$$

where  $P$  is the packet size in bits,  $C$  is the channel data transmission rate in bits per second and  $T$  is the time slot duration which must either be long enough to allow a collision to be detected or at least twice the ETHERNET Channel's round trip time. There should be a limit in software of the maximum length of the packets to be near 4,000 bits (500 Bytes plus overhead) to keep the latency of the network access down and to permit efficient use of station packet buffer storage.

Assuming a packet size of 512 Bytes total, a 10 Mbps (1.25Mbps) ETHERNET channel transfer rate and a slot duration of 16 microseconds (8000 feet of cable) the efficiency is:

$$\begin{aligned}
 E &= \left( \frac{512}{1.25 \times 10^6} \right) / \left( \frac{512}{1.25 \times 10^6} + 1.58 \times 16 \times 10^{-6} \right) \\
 &= 4.09 \times 10^{-4} / (4.09 \times 10^{-4} + 2.528 \times 10^{-5}) \\
 &= .94178
 \end{aligned}$$

or 94.178% of the packets are good packets

or for a fully loaded bus 94.178% of the time good packets are transmitted.

Table 3.1 summarizes this comparison of worst case possibilities and statistical performance parameters.

TO IMPROVE PERFORMANCE, THE VAX 11/780 SHOULD HAVE ONE UNIBUS DEDICATED TO THE I/O OF THE SPACE TELESCOPE DATA INPUT AND THE ETHERNET CHANNEL DATA REQUESTS.

TABLE 3.1

WORST CASE AND STATISTICAL AVERAGE PERFORMANCE ESTIMATES FOR  
ETHERNET INTERCONNECTION OF VIDEO TERMINAL/VAX 11/730.

Assumptions: All 80 Terminals Request Screen Data Change Simultaneously. (1920 Bytes/Screen refresh or change). 8 Terminals Per VAX 11/730; 5 Second Screen Refresh Period; 3 Minute Screen Change Request on the Average. 10 VAX 11/730's, 1 VAX 11/780; 1 PE3254 Linked Together.

	LONGEST WAITING TIME (NO COLLISIONS)		LONGEST WAITING TIME (NO COLLISIONS)		LONGEST WAITING TIME 10% COLLISIONS, 50% SCREEN REFRESH ELIMINATED
	FOR SCREEN CHANGE	10% COLLISIONS	FOR SCREEN CHANGE, 50% SCREEN REFRESH ELIMINATED		
WORST CASE: I					
Assuming 1920 Bytes Per Packet	1.04 Seconds	1.352 Seconds	0.78 Seconds		1.016 Seconds
WORST CASE: II					
Assuming 512 Bytes per Packet	1.23 Seconds	1.6 Seconds	0.95 Seconds		1.25 Seconds
AVERAGE STATISTICAL PARAMETERS:					
(16μsec per Slot)					
512 Bytes/Packet	1.58 Slots = 25.3μsec.	9.6 ms	.3874	94%	6%
256 Bytes/Packet	1.58 Slots = 25.3μsec.	20.2 ms	.3874	89%	11%
128 Bytes/Packet	1.58 Slots = 25.3μsec.	48.6 ms	.3874	80.2%	19.8%
AVERAGE TIME TO REFRESH SCREEN WITH 1920 BYTES ASSUMING SE- QUENTIAL SERVICING OF VAX 11/730's BY VAX 11/780, (WITH COLLISIONS)					
AVERAGE WAITING TIME			PROBABILITY OF NO WAITING	PERCENTAGE GOOD PACKETS ON BUS (EFFICIENCY)	AVERAGE COLLISION PERCENTAGE

### 3.3 CONCLUSIONS

Under the assumptions of the system architecture as envisioned at the time this analysis was performed, the system had 80 video terminals in a configuration of 8 video terminals per a VAX 11/730, with the 10 VAX 11/730's connected to two host computers (VAX 11/780 and a PE 3254) by the ETHERNET network. (November-December 1983 monthly report for this contract).

The analysis illustrates a worst case time of 1.6 seconds to change all 80 screen contents to new displays if 512 bytes were used per packet (in the ETHERNET protocol a packet is the transmission frame). There is a dependency between waiting time and packet length with the worst case waiting time projected to be 1.252 seconds for a packet length of 1920 bytes. Statistical parameters indicate a 48 MS screen change time for 128 bytes per packet and 10 MS for 512 bytes packet.

The most important point that is illustrated with the analysis is the fact that the major limiting factor in the data transfer was felt to be the VAX 11/780 rather than the ETHERNET network. This is felt to be due to the VAX 11/780 throughput time and it was recommended that the VAX 11/780 should have one UNIBUS dedicated to the I/O of the Space Telescope data input and the ETHERNET channel data requests.

A review of the November/December 1983 report containing this analysis is recommended for those involved in the consideration of adding 2 POCC requirements to the 160 terminals that are now in consideration.

### 3.4 DISCUSSION OF SIMULATION ANALYSIS RESULTS

A simulation program for the general ETHERNET system has been developed by General Dynamics, Inc., Fort Worth, Texas. (GDFW). This program was exercised for the proposed 80 terminal (10 VAX 11/730 host) video terminal system as a courtesy to NASA/MSFC by DFGW via a request by this investigator. The data in Tables 3.2 and 3.3 of this section are results of the equivalent of 15 seconds of run time of the video terminal system.

The simulation was run for a 70%/30% relative loading between the VAX 11/780 and the PE 3254 (reference Figure 3.1) and also for a 50%/50% relation loading between the VAX 11/780 and the PE 3254. Data packet sizes were varied from 960 bytes per packet to as little as 120 bytes per packet and a constant total data block of 1920 bytes was assumed (worst case screen change).

#### OBSERVATIONS OF THE SIMULATIONS ARE:

(1) The smaller packet sizes (120 bytes per packet) are to be avoided due to adverse effects on collision rate and delay times.

(2) Video change requests are troublesome if they happen to occur during a 1920 byte data dump by the VAX 11/780/PE3254 units.

(3) It is suggested (as was also demonstrated by analysis) that the larger packet sizes be used and that video change requests not be transmitted during video screen dumps or, as an alternate, space the video dumps by the VAX 11/780/PE 3254 units by 1 or 2 milliseconds to allow VAX 11/730 video change requests to be transmitted.

There was good agreement between the analysis (Table 3.4) and the simulation results.



The simulation results are contained in the section 3.5. The writing in this section defines the terms used in the Tables 3.2 and 3.3. Table 3.2 presents the system parameters as they developed during a simulation of 15 seconds of Video terminal ETHERNET data flow which assumed that all 80 terminals are receiving a full screen refresh of 1920 bytes every 5 seconds. Table 3.3 presents the system parameters as they developed during a simulation of 15 seconds of VIDEO Terminal ETHERNET data flow which assumed that all 80 terminals are receiving a full screen refresh of 1920 bytes every 5 seconds and that video requests are being received so as to result in a complete screen change for every terminal every three minutes. The worst case scenario for Table 3.3 was used. This assumed that the VAX 11/780 and the PE 3254 were assumed to be synchronized and would begin their dumps on the ETHERNET at exactly the same time.

The parameters of most interest are the collision frequency and the process times.

The worst case analysis and the statistical average analysis were calculated assuming a 10% collision frequency. Inspection of Table 3.2 and Table 3.3 illustrates a collision frequency of approximately 10% for the short length data packets (120 bytes per packet) for the light load simulations (Table 3.2) and 10% collision frequency for virtually all the packet lengths simulated for the heavy load simulation (Table 3.3). Thus the simulation results in so far as collision frequency are in very good agreement with the analysis assumptions.

The analysis for absolute worst case predicts a worst case longest waiting time of 1.6 seconds (512 byte packets) to complete a

video screen change request assuming a heavy load situation (all video screen operators are assumed to request a screen change) with 10% collisions. The statistical average analysis predicts a longest waiting time of 9.6 MS (with 512 byte packets) and 48.6 MS for 128 byte packets). The simulation run for the heavy load situation (Table 3.3) illustrates a maximum individual packet waiting time of 117 MS for 480 byte packets and 61 MS with 120 byte packets for the 70%/30% VAX 11/780 to PE 3254 load balance. For a 50%/50% VAX 11/780 to PE 3254 load balance the simulation results indicate a 500 MS waiting time for 480 byte packets and a 61 MS waiting time for 120 byte packets.

To compare these results it is necessary to calculate the total waiting time anticipated for a video screen change. Table 3.4 compares these results in the best manner possible. It may be observed that the worst case analysis and the worst case simulation agree quite well, considering the assumptions made, while the average parameters under simulation seem to be a better estimate than the average analysis. The statistical analysis average assumed true Poission distribution of screen change requests and no synchronization between data dumps of the VAX 11/780 and the PE 3254. Thus the most optimistic performance is estimated by the statistical analysis.

THE LESSONS TO BE LEARNED ARE QUITE CLEAR:

- (1) TO REDUCE COLLISIONS USE LONG DATA PACKETS (1960 BYTES)
- (2) PROVIDE A MINIMUM SPACE TIME (1MS PERHAPS) BETWEEN NORMAL SCREEN REFRESH DATA DUMPS FROM THE VAX 11/780 AND THE PE 3254. THIS

WILL ALLOW VIDEO SCREEN CHANGE REQUESTS TO MOVE FROM THE TERMINAL TO THE VAX 11/780 AND THE PE 3254.

(3) THE VAX 11/780 IS THE MAJOR LIMITING FACTOR UNDER FULL LOAD. ONE UNIBUS IN THE VAX 11/780 SHOULD BE DEDICATED TO THE I/O FOR THE SPACE TELESCOPE DECOMMUTATED DATA LINK AND THE ETHERNET LINK TO THE VIDEO TERMINALS.

### 3.5 SIMULATION ANALYSIS

These statistics were compiled by GDFW for Frank Ingels of Mississippi State in connection with a proposed satellite data retrieval and processing network. The hardware configuration consists of the raw data receptors, the conditioned data receptors, the user terminals, and the communications link between the two data receptors.

The raw data receptors take the satellite information and modify it. These modifications are performed by a VAX 11/780 and a PE 3254. These two in turn place the conditioned data (which are video terminal updates) on one ethernet line and send it to 10 VAX 11/730'S. These VAX'S act as flow managers for the ETHERNET. Each VAX 11/730 handles 8 video terminals and channels updates and screen change requests to/from these terminals through one ETHERNET tap.

There are 3 message types that come across the ETHERNET. The first type is video update. The message type is sent by the data conditioners to the VAX 11/730'S. Data length is 1920 bytes. The second type is video request, and is initiated by the video terminals. It is sent through the VAX 11/730's to either the VAX 11/780 or the PE 3254. It is 512 bytes long. This video request generates the third message type, called video response. Video response is similar to video update in length and origin.

The simulation modeled the I/O ports of the VAX 11/780, the PE 3254, and the 10 VAX 11/730's. It simulated the traffic flow along an ETHERNET bus, given maximum expected loads. These loads included 80 active video terminals, each of which received an update every 5

seconds. Approximately every 2.25 seconds ( $\pm$  2.25 seconds) a video terminal will request a screen change. This request generates a response at the data conditioners. The response is sent back to the terminal.

Note that delay times internal to the data conditioners or the flow manager-terminal pair are not included in delay-measurement of video response. THIS DELAY MEASUREMENT MERELY REFLECTS DELAY INDUCED BY THE ETHERNET NETWORK CONFIGURATION.

The video updates are released as a queued dump from the VAX 11/780 and the PE 3254 every 5 seconds. Worst case was taken; that is, the VAX 11/780 and the PE 3254 were assumed to be exactly synchronized and would begin their dumps at the same time. The video requests were released so as to simulate a complete screen change for all 80 terminals every three minutes.

Timing for the simulation occurred on the 1 step per microsecond level. Simulation language limits on the size of variables restricted runs to 15 seconds of simulated time, or three dump cycles. These 3-cycle runs were executed for two different parameters. They were also run for only video updates, and then for all three message types.

The parametric variables were

(1) Relative loading of the VAX 11/780 and the PE 3254,  
and

(2) The frame size of the video updates.

Variation of relative loading came about as the result of uncertainty as to how much of the total load each data conditioner would in fact have.

Frame size was varied in order to determine whether message length (and of course the number of messages) has an effect on throughput and bus utilization.

#### EXPLANATION OF CHARTS: (TABLES 3.2 AND 3.3)

- (1) MSSG Delay: Every 5 seconds the data conditioner dumps a new MSSG. MSSG delay is the time that it takes a message to reach its destination (A VAX 11/730) minus the time of the beginning of the slice.
- (2) Slice Times: The time of the last video update message to be executed in the current slice determines slice time.
- (3) Bus Times:
  - (a) Entries denote # of times that information was pushed onto the bus.
  - (b) Total time = total time of the three cycles, 15 second interval, that the bus was active.
  - (c) % util(active) is the bus utilization rate during the time that messages were waiting to be processed.  

$$\% \text{ UTIL(ACTIVE)} = (\text{TOTAL TIME}) / (\text{SLICE TIME})$$
  - (d) % UTIL(TOTAL) = (TOTALTIME) / 15 SECONDS
- (4) Collisions:
 

Collisions can occur during the first 45  $\mu$ s of frame transmission.

  - (a) Ave # of attempts ( $\geq 1$ ) is the average # of times any message is pushed onto the bus during the simulation.
- (5) Process Time: The process time a message incurs is the time interval from the moment it is loaded into the

ETHERNET I/O port to the time it is received at the target I/O port.

- (a) Video request/response time is the max process time of the video request and the process time of the video response frames.

TABLE 3.2

## SIMULATION RESULTS, NO VIDEO CHANGE REQUESTS

X/Y = VAX x %; PE+E y%      ETHERNET      INGELS - STEADY - STATE - NO VID. REQ.

	70/30	70/30	70/30	70/30	50/50	50/50	50/50	50/50	50/50
TYPE OF STAT	2 x 960	4 x 480	8 x 240	16 x 120	2 x 960	4 x 480	8 x 240	16 x 120	50/50
SLICE MSGG DELAY									
MAX DELAY	142.5 ms	169.5 ms	162 ms	238.5 ms	163.5 ms	156 ms	156 ms	256.5 ms	
AVE DELAY	66.7 ms	79.5 ms	73.4 ms	102 ms	74.0 ms	76.3 ms	77.9 ms	114.2 ms	
STD. DEV = DELAY	39.3 ms	48.74 ms	44.3 ms	62.9 ms	45.5 ms	46.5 ms	46.8 ms	66.0 ms	
SLICE TIMES									
MAX =	1425 ms	170.0 ms	162.5 ms	240 ms	165 ms	157.5 ms	157.5 ms	257.5 ms	
AVE =	134.9 ms	156.7 ms	149.7 ms	211 ms	145 ms	151.2 ms	154.3 ms	239 ms	
LOW =	132.5 ms	142.5 ms	142.0 ms	170 ms	134 ms	145.0 ms	152.4 ms	203 ms	
BUS TIMES									
ENTRIES	550	1032	1988	4418	546	1028	1988	4464	
AVE BUS TIMES	693.2 $\mu$ s	378.8 $\mu$ s	206.16 $\mu$ s	106.2 $\mu$ s	698 $\mu$ s	380 $\mu$ s	206.2 $\mu$ s	105.4 $\mu$ s	
STD. DEV	2484 $\mu$ s	91.9 $\mu$ s	31.1 $\mu$ s	25.6 $\mu$ s	242 $\mu$ s	89.9 $\mu$ s	30.8 $\mu$ s	26.6 $\mu$ s	
TOTAL TIME	.381257 s	.390922 s	.409848 s	.468992 s	.381106 s	.39072 s	.409925 s	.470705 s	
%UTIL(ACTIVE SLICE)	94%	83%	91%	74.1%	87.6%	86%	88.6%	65.6%	
%UTIL(TOTAL SLICE)	2.54%	2.6%	2.73%	3.13%	2.54%	2.6%	2.73%	3.14%	
COLLISIONS									
# COLLISIONS	35	36	34	289	33	34	34	312	
AVE COLLISION #(>1)	3.54	3.89	3.75	2.79	3.62	3.735	3.75	2.89	
MAX # OF ATTEMPTS	12	13	13	19	12	12	12	11	
PROCESS TIME									
VAX 11/780 AND PE+E VIDEO UPDATE									
MAX	107 ms	120 ms	119 ms	48 ms	93 ms	103 ms	99 ms	52 ms	
AVE	1.42 ms	716 $\mu$ s	352 $\mu$ s	2488 $\mu$ s	1.29 ms	6728 $\mu$ s	346 $\mu$ s	282.8 $\mu$ s	
STD. DEV.	7.81 ms	5.6 ms	3.77 ms	1.675 ms	6.42 ms	4.78 ms	3.36 ms	2 ms	
# OF ENTRIES	480	960	1920	3840	480	960	1920	3840	



TABLE 3.3

## SIMULATION RESULTS WITH VIDEO CHANGE REQUESTS

X/Y = VAX x %; PE+E y%      INGELS SATELLITE ETHERNET - FULL DRESS (With Video Req.)

	70/30	70/30	70/30	70/30	50/50	50/50	50/50	50/50
STATISTIC TYPE	2x960	4x480	8x240	16x120	2x960	4x480	8x240	16x120
SLICE MSSG DELAY								
AVE VAX/PE+E	68.5 ms	79.8 ms	98.9 ms	109.9 ms	796 ms	92.6 ms	94.8 ms	122.7 ms
AVE VIDEO REQ	51.2 ms	430 $\mu$ s	430 $\mu$ s	430 $\mu$ s	430 ms	501 ms	500 ms	430 $\mu$ s
MAX VIDEO/REQ	4.1 ms	3 ms	3 ms	3 ms	960 ms	503 ms	560 ms	3 ms
SLICE TIMES*								
MAX	142.5 ms	172.5 ms	231 ms	238 ms	180 ms	206 ms	198 ms	262.5 ms
AVE (APPROX)	138 ms	152 ms	208 ms	215 ms	167 ms	198 ms	176 ms	251 ms
LOW	732.5 ms	142.5 ms	203 ms	210 ms	163 ms	190 ms	171 ms	240 ms
BUS TIMES								
ENTRIES	595	1207	2352	4491	613	1294	2481	4544
AVE BUS TIMES	672.4 $\mu$ s	337.6 $\mu$ s	184.1 $\mu$ s	106.8 $\mu$ s	641.4 $\mu$ s	319 $\mu$ s	177.6 $\mu$ s	105.7 $\mu$ s
STD DEV. FR. AVE	266 $\mu$ s	140.3 $\mu$ s	64.6 $\mu$ s	27~5 $\mu$ s	294 $\mu$ s	153 $\mu$ s	69.9 $\mu$ s	28.5 $\mu$ s
TOTAL TIME	.40008 s	.407438 s	.433881 s	.47984 s	.39323 s	.412916 s	.440765 s	.48025 s
%UTIL(ACTIVE)	~ 96.6%	~99.3%	~70%	~74.4%	~78.5%	~69.6%	~83.4%	~64.4%
%UTIL(TOTAL)	~2.65%	~2.75%	2.89%	3.2%	2.62%	2.75%	2.94%	3.2%
COLLISIONS								
# COLLISIONS	44	111	196	283	59	152	254	318
AVE # COLLISION ( $\geq 1$ )	3.94	3.022	3.012	2.87	3.31	3.11	2.96	2.90
MAX # OF ATTEMPTS	12	14	11	14	12	12	OVER	10
PROCESS TIME								
	-VAX	.730	VIDEO REQ.					
MAX	1 s	117 ms	63 ms	61 ms	1 s	500 ms	500 ms	61 ms
AVE	21.1 ms	793.9 $\mu$ s	485 $\mu$ s	256 $\mu$ s	21.6 ms	5.92 ms	3.01 ms	285 $\mu$ s
STD DEV.	444 ms	5.1 ms	3.16 ms	1.98 ms	44.9 ms	159 ms	112 ms	2.07 ms

\*SLICE TIMES TAKEN FROM VAX/PE+E MSSG DELAY TABLES

TABLE 3.4  
COMPARISON OF STATISTICAL AND SIMULATION RESULTS

COMPARISON OF WAITING TIMES FOR VIDEO SCREEN CHANGE  
ASSUMPTIONS ARE AS FOR TABLE II: MAX LOAD ON BUS AND  
ALL 80 TERMINALS REQUEST VIDEO SCREEN CHANGE AT 2.25  
SECOND INTERVALS WHILE FULL SCREEN REFRESH DATA (1920 BYTES PER SCREEN)  
IS BEING TRANSMITTED FROM VAX 11/780/PE 3254 TO EACH TERMINAL

MAX WAITING TIME FOR COMPLETE VIDEO SCREEN CHANGE	ABSOLUTE WORSE CASE (10% COLLISIONS) ANALYSIS	REFRESH AVG WAITING TIME FOR SCREEN STATISTICAL AVERAGE (10% COLLISIONS) (ASSUMES NO SYNCHRONIZATION BETWEEN REQUESTS AND DATA DUMP	SIMULATION WORST CASE WAITING TIME FOR SCREEN REFRESH. (ASSUME SYNCHRONI- ZATION BETWEEN DATA DUMPS FROM VAX 11/780 AND PE 3254)	SIMULATION AVG WAITING TIME FOR SCREEN SCREEN REFRESH
128 byte/packet	_____	48.6 ms	70%/30% 976 ms	70%/30% 217 ms
512 byte/packet	1.6 seconds	9.6 ms	50%/50% 976 ms	50%/50% 186 ms
1960 byte/packet	1.352 seconds	_____	468 ms	480 ms
			2.0 sec	412 ms
			2.0 sec	768 ms
				832 ms

## 5.0 REFERENCES

1. System for the Huntsville Operational Support Center Distributed Computing System, D. Massey and F. Ingels, Annual Report 1985, NAS8-34906.
2. Verbal Conversation with Mr. Sherman Jobe, NASA/MSFC, 205+453-4629
3. Ethernet: Distributed Packet Switching for Local Computer Networks, R. M. Metcalfe and D R Boggs, ACM Communications, July 1976, Vol. 19, No. 7, page 395-404.

APPENDIX I  
BACKUP SIMULATION DATA

SECTION	TITLE
1.1	A TYPICAL HOSC ACTIVITY CONFIGURATION
1.2	A CURRENT HOSC ACTIVITY UNDER HEAVY LOADING
1.3	A RERUN OF FIGURE 2.2 RECONFIGURED
1.4	ANTICIPATED HOSC/CREY CONFIGURATION UNDER EXTREME LOADING
1.5	A RERUN OF FIGURE 2.4 WITH REDUCED LOADING
1.6	SUGGESTED HOSC/CREY CONFIGURATION FOR EXTREME LOADING

**SECTION 1.1****A TYPICAL HOSC ACTIVITY CONFIGURATION**

ORIGINAL PAGE IS  
OF POOR QUALITY

\*\*\*\*\*  
NETWORK DESCRIPTION  
ADAPTER # 1  
\*\*\*\*\*

ADAPTER # 1:

PRIORITY DELAY ON TRUNK 1: 0.0000077 SEC  
FIXED DELAY: 0.0000061 SEC  
TOTAL DELAY ON TRUNK 1: 0.0000194 SECS  
ADAPTER RETRY COUNT: 62

DEVICE 1 STATUS: CLOSED--11

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.0000000 SEC  
NUMBER OF DATA SOURCES: 1  
111

DEVICE NUMBER 111  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0500 SEC  
DATA BLOCK COUNT: 4.882812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:111  
RECEIVER ID: 521 PROBABILITY: 9.0E-01  
RECEIVER ID: 211 PROBABILITY: 1.0E-01

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

\*\*\*\*\*  
NETWORK DESCRIPTION  
ADAPTER # 2  
\*\*\*\*\*

ADAPTER # 2:

ORIGINAL PAGE IS  
OF POOR QUALITY

PRIORITY DELAY ON TRUNK 1 : 0.0000041 SEC  
FIXED DELAY: 0.0000061SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000194SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--21

I/O BUS TRANSFER RATE: 50000.00 BYTES/SEC  
LOAD TIME: 0.0000025 SEC  
NUMBER OF DATA SOURCES: 1  
211

DEVICE NUMBER 211

SUFFER SIZE: 2.1E+03 BYTES

SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES

TRUNK TRANSMISSION INTERVAL: 0.1050 SEC

DATA BLOCK COUNT: 1.025390625E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:211

RECEIVER ID: 111  
PROBABILITY: 3.0E-01

RECEIVER ID: 511  
PROBABILITY: 3.0E-01

RECEIVER ID: 611  
PROBABILITY: 3.0E-01

RECEIVER ID: 621  
PROBABILITY: 1.0E-01

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

NETWORK DESCRIPTION  
ADAPTER # 3

ADAPTER # 3:

PRIORITY DELAY ON TRUNK 1 : 0.0000005 SEC  
FIXED DELAY: 0.0000061SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000194SECS  
ADAPTER RETRY COUNT : 64

PRIORITY DELAY ON TRUNK 2 : 0.00000077SEC  
FIXED DELAY: 0.0000061SEC  
TOTAL DELAY ON TRUNK 2 : 0.0000226SEC

DEVICE 1 STATUS: CLOSED--31

I/O BUS TRANSFER RATE: 50000.00 BYTES/SEC

ORIGINAL PAGE IS  
OF POOR QUALITY

LOAD TIME: 0.000025 SEC  
NUMBER OF DATA SOURCES: 1

311

DEVICE NUMBER 311  
BUFFER SIZE: 2.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.1000 SEC  
DATA BLOCK COUNT: 9.765629000E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 311

RECEIVER ID: 111  
PROBABILITY: 2.0E-01  
RECEIVER ID: 211  
PROBABILITY: 2.0E-01  
RECEIVER ID: 411  
PROBABILITY: 2.0E-01  
RECEIVER ID: 511  
PROBABILITY: 2.0E-01  
RECEIVER ID: 611  
PROBABILITY: 2.0E-01

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

# NETWORK DESCRIPTION ADAPTER # 4

ADAPTER # 4:

PRIORITY DELAY ON TRUNK 2: 0.0000003SECS  
FIXED DELAY ON TRUNK 2: 0.0000001SECS  
TOTAL DELAY ON TRUNK 2: 0.0000226SECS  
ADAPTER RETRY COUNT: 64

DEVICE 1 STATUS: CLOSED--41

I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
LOAD TIME: 0.000002 SEC  
NUMBER OF DATA SOURCES: 1

411

DEVICE NUMBER 411  
BUFFER SIZE: 4.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 5000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.3000SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 411

RECEIVER ID: 611  
PROBABILITY: 2.0E-01  
RECEIVER ID: 531  
PROBABILITY: 8.0E-01



ORIGINAL PAGE IS  
OF POOR QUALITY

DEVICE 2 STATUS : CLOSED--42

I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
LOAD TIME: 0.0000002 SEC  
NUMBER OF DATA SOURCES: 1

421  
DEVICE NUMBER 421

SOURCE # 1 DATA GENERATION RATE: 7000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.9143 SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 421

RECEIVER ID: 111  
RECEIVER ID: 621  
PROBABILITY: 3.0E-01  
PROBABILITY: 7.0E-01

DEVICE 3 STATUS : OPEN

DEVICE 4 STATUS : OPEN

\*\*\*\*\*

NETWORK DESCRIPTION  
ADAPTER # 5

\*\*\*\*\*

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 2 : 0.0000045 SECS  
FIXED DELAY ON TRUNK 2 : 0.0000001 SECS  
TOTAL DELAY ON TRUNK 2 : 0.00000226 SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS : CLOSED--51

I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
LOAD TIME: 0.0000002 SEC  
NUMBER OF DATA SOURCES: 1

511  
DEVICE NUMBER 511

SOURCE # 1 DATA GENERATION RATE: 1250.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4080 SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 511

RECEIVER ID: 411  
RECEIVER ID: 421  
PROBABILITY: 6.0E-01  
PROBABILITY: 4.0E-01

DEVICE 2 STATUS : CLOSED--52

I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
LOAD TIME: 0.0000002 SEC  
NUMBER OF DATA SOURCES: 1

521  
DEVICE NUMBER 521

BUFFER SIZE: 5.1E+02 BYTES

ORIGINAL PAGE IS  
OF POOR QUALITY

SOURCE # 1 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4080SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 521  
RECEIVER ID: 411  
PROBABILITY: 6.0E-01  
RECEIVER ID: 421  
PROBABILITY: 4.0E-01

DEVICE 3 STATUS : CLOSED--53

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
531

DEVICE NUMBER 531  
BUFFER SIZE: 6.3E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 3750.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.1680SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 531  
RECEIVER ID: 421  
PROBABILITY: 2.0E-01  
RECEIVER ID: 621  
PROBABILITY: 8.0E-01

DEVICE 4 STATUS : OPEN

\*\*\*\*\*

NETWORK DESCRIPTION  
ADAPTER # 5

\*\*\*\*\*

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 2 : 0.0000117SECS  
FIXED DELAY ON TRUNK 2 : 0.0000051SECS  
TOTAL DELAY ON TRUNK 2 : 0.0000226SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS : CLOSED--61

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
511

DEVICE NUMBER 611  
BUFFER SIZE: 2.0E+03BYTES  
SOURCE # 1 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 1.6000SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 511  
RECEIVER ID: 111  
PROBABILITY: 1.0E-01  
RECEIVER ID: 411  
PROBABILITY: 5.0E-01  
RECEIVER ID: 531  
PROBABILITY: 1.0E-01

DEVICE 2 STATUS : CLOSED--62

I/O BUS TRANSFER RATE: 1200000.00 BYTES/SEC  
LOAD TIME: 0.0000001 SEC

NUMBER OF DATA SOURCES: 1  
621

DEVICE NUMBER 621

BUFFER SIZE: 2.0E+03BYTES

SOURCE # 1 DATA GENERATION RATE: 1250.00BYTES

TRUNK TRANSMISSION INTERVAL: 1.6000SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 621

RECEIVER ID: 211

PROBABILITY: 1.0E-01

RECEIVER ID: 511

PROBABILITY: 1.0E-01

RECEIVER ID: 421

PROBABILITY: 8.0E-01

DEVICE 3 STATUS : CLOSED--63

I/O BUS TRANSFER RATE: 1200000.00 BYTES/SEC

LOAD TIME: 0.0000001 SEC

NUMBER OF DATA SOURCES: 1

631

DEVICE NUMBER 631

BUFFER SIZE: 2.0E+03BYTES

SOURCE # 1 DATA GENERATION RATE: 1250.00BYTES

TRUNK TRANSMISSION INTERVAL: 1.6000SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 631

RECEIVER ID: 511

PROBABILITY: 2.0E-01

RECEIVER ID: 311

PROBABILITY: 2.0E-01

RECEIVER ID: 421

PROBABILITY: 6.0E-01

DEVICE 4 STATUS : OPEN

**SECTION 1.2****A CURRENT HOSC ACTIVITY UNDER HEAVY LOADING**

ORIGINAL PAGE IS  
OF POOR QUALITY

ADAPTER # 1:

PRIORITY DELAY ON TRUNK 1 : 0.0000093 SEC  
FIXED DELAY: 0.0000049 SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000152 SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--11

I/O BUS TRANSFER RATE: 330000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
111

DEVICE NUMBER 111  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 120000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0500 SEC  
DATA BLOCK COUNT: 4.892212500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 111  
RECEIVER ID: 211

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

NETWORK DESCRIPTION  
ADAPTER # 2

ADAPTER # 2:

PRIORITY DELAY ON TRUNK 1 : 0.0000093 SEC

FIXED DELAY: 0.0000049SEC  
 TOTAL DELAY ON TRUNK 1: 0.0000182SECS  
 ADAPTER RETRY COUNT: 64

DEVICE 1 STATUS: CLOSED--21

I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
 LOAD TIME: 0.0000002 SEC  
 NUMBER OF DATA SOURCES: 1  
 211

DEVICE NUMBER 211

SOURCE # 1 DATA GENERATION RATE: 500000.00 BYTES

TRUNK TRANSMISSION INTERVAL: 0.0040 SEC

DATA BLOCK COUNT: 9.765625000E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 211

RECEIVER ID: 331 PROBABILITY: 1.0E+00

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

ORIGINAL PAGE IS  
 OF POOR QUALITY

# NETWORK DESCRIPTION

ADAPTER # 3

ADAPTER # 3:

PRIORITY DELAY ON TRUNK 1: 0.0000005 SEC

FIXED DELAY: 0.0000049SEC

TOTAL DELAY ON TRUNK 1: 0.0000182SECS

ADAPTER RETRY COUNT: 64

DEVICE 1 STATUS: CLOSED--31

I/O BUS TRANSFER RATE: 3100000.00 BYTES/SEC  
 LOAD TIME: 0.0000000 SEC  
 NUMBER OF DATA SOURCES: 2  
 311

DEVICE NUMBER 311

SOURCE # 1 DATA GENERATION RATE: 1300.00 BYTES

TRUNK TRANSMISSION INTERVAL: 0.7692 SEC

DATA BLOCK COUNT: 4.822312100E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:311  
RECEIVER ID: 321

312

DEVICE NUMBER 312  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 2 DATA GENERATION RATE: 1000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 1.0000 SEC  
DATA BLOCK COUNT: 4.382312500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:312  
RECEIVER ID: 421

DEVICE 2 STATUS: CLOSED--22

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
331

DEVICE NUMBER 321  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 10.0000 SEC  
DATA BLOCK COUNT: 4.382312500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:321  
RECEIVER ID: 111

DEVICE 3 STATUS: CLOSED--33

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
331

DEVICE NUMBER 331  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 10.0000 SEC  
DATA BLOCK COUNT: 4.382312500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:331  
RECEIVER ID: 211

DEVICE 4 STATUS: CLOSED--34

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
341

DEVICE NUMBER 341  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 3250.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.1600 SEC  
DATA BLOCK COUNT: 4.552912500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:341  
RECEIVER ID: 141

ORIGINAL PAGE IS  
OF POOR QUALITY

ORIGINAL PAGE IS  
OF POOR QUALITY

\*\*\*\*\*  
NETWORK DESCRIPTION  
ADAPTER # 4  
\*\*\*\*\*

ADAPTER # 4:

PRIORITY DELAY ON TRUNK 1: 0.0000057 SEC  
FIXED DELAY: 0.0000049 SEC  
TOTAL DELAY ON TRUNK 1: 0.0000182 SECS  
ADAPTER RETRY COUNT: 04

PRIORITY DELAY ON TRUNK 2: 0.0000005 SEC  
FIXED DELAY: 0.0000141 SEC  
TOTAL DELAY ON TRUNK 2: 0.0000435 SEC

DEVICE 1 STATUS: CLOSED--41

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.0000000 SEC  
NUMBER OF DATA SOURCES: 1  
411

DEVICE NUMBER 411  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 1 DATA GENERATION RATE: 2400.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.2033 SEC  
DATA BLOCK COUNT: 2.441406250E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 411  
RECEIVER ID: 511  
PROBABILITY: 1.0E+00

DEVICE 2 STATUS: CLOSED--42

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 1  
421

DEVICE NUMBER 421  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
DATA BLOCK COUNT: 2.441406250E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 421  
RECEIVER ID: 441  
PROBABILITY: 2.0E-01  
RECEIVER ID: 511  
PROBABILITY: 3.0E-01  
RECEIVER ID: 521  
PROBABILITY: 3.0E-01  
RECEIVER ID: 411  
PROBABILITY: 2.0E-01

DEVICE 3 STATUS: CLOSED--43

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000000 SEC  
NUMBER OF DATA SOURCES: 1  
431



DEVICE NUMBER 431  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
 DATA BLOCK COUNT: 2.441406250E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 431  
 RECEIVER ID: 522  
 PROBABILITY: 1.0E+00

DEVICE 4 STATUS: CLOSED--44  
 I/O BUS TRANSFER RATE: 30000.00 BYTES/SEC  
 LOAD TIME: 0.0000004 SEC  
 NUMBER OF DATA SOURCES: 2

441  
 DEVICE NUMBER 441  
 BUFFER SIZE: 1.0E+03 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 10000.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.0100 SEC  
 DATA BLOCK COUNT: 4.982812500E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 441  
 RECEIVER ID: 421  
 PROBABILITY: 1.0E+00

442  
 DEVICE NUMBER 442  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 2 DATA GENERATION RATE: 1200.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
 DATA BLOCK COUNT: 2.441406250E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 442  
 RECEIVER ID: 411  
 PROBABILITY: 1.0E+00

# NETWORK DESCRIPTION ADAPTER # 5

ADAPTER # 5:  
 PRIORITY DELAY ON TRUNK 2: 0.00000015E03  
 FIXED DELAY ON TRUNK 2: 0.000001415E03  
 TOTAL DELAY ON TRUNK 2: 0.00000435E03  
 ADAPTER ENTRY COUNT: 4

DEVICE 1 STATUS: CLOSED--11  
 I/O BUS TRANSFER RATE: 30000.00 BYTES/SEC  
 LOAD TIME: 0.0000004 SEC  
 NUMBER OF DATA SOURCES: 1

ORIGINAL PAGE IS  
OF POOR QUALITY

511

DEVICE NUMBER 511  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 511  
RECEIVER ID: 521  
PROBABILITY: 3.0E-01  
RECEIVER ID: 441  
PROBABILITY: 4.0E-01  
RECEIVER ID: 421  
PROBABILITY: 3.0E-01

DEVICE 2 STATUS : CLOSED--52

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004-SEC  
NUMBER OF DATA SOURCES: 2  
521

DEVICE NUMBER 521  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 521  
RECEIVER ID: 511  
PROBABILITY: 3.0E-01  
RECEIVER ID: 441  
PROBABILITY: 4.0E-01  
RECEIVER ID: 442  
PROBABILITY: 3.0E-01

522

DEVICE NUMBER 522  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 2 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4700SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 522  
RECEIVER ID: 431  
PROBABILITY: 1.0E+00

DEVICE 3 STATUS : OPEN

DEVICE 4 STATUS : OPEN

\*\*\*\*\*

# NETWORK DESCRIPTION ADAPTER # 5

\*\*\*\*\*

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 2 : 0.0000157SECS  
FIXED DELAY ON TRUNK 2: 0.000014157SECS  
TOTAL DELAY ON TRUNK 2: 0.000029857SECS  
ADAPTER V-TIME COUNT : 54

DEVICE 1 STATUS : CLOSED--51

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC

NUMBER OF DATA SOURCES: 1  
511

```

DEVICE NUMBER: 611
SOURCE SITE: 5.0E+02BYTES
SOURCE M10A1A GENERATION RATE: 1250.00BYTES
TRUNK TRANSMISSION INTERVAL: 0.4000SECS
CRIVE PROBABILITIES FOR: 611
PROBABILITY: 5.0E-01
PROBABILITY: 5.0E-01

```

ADVERTISING RECEIPTS AND THEIR  
RECEIVER ID: 421  
RECEIVED ID: 473

10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525  
 526  
 527  
 528  
 529  
 530  
 531  
 532

[illegible]

DEVICE & STATUS : 3000

[illegible]

01  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855

[illegible]

**SECTION 1.3****A RERUN OF FIGURE 2.3 RECONFIGURED**

ORIGINAL PAGE IS  
OF POOR QUALITY

\*\*\* END OF RUN NETWORK STATISTICS \*\*\*

CURRENT TIME : 10.0000 SECS

SUCCESSFUL SEQUENCE TRANSMISSIONS	:	3505
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1	:	3325
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2	:	180
COLLISIONS (FRAMES)	:	192
WAITS (FRAMES)	:	2.65+03
TOTAL ATTEMPTS (SEQUENCES)	:	3510
TOTAL ABORTS	:	4
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS	:	551
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS	:	39
TRUNK 1 ACTIVE TIME	:	1.5903061 SECS
TRUNK 2 ACTIVE TIME	:	0.0803471 SECS
TOTAL TRUNK ACTIVE TIME	:	1.7611532 SECS
% TRUNK 1 ACTIVE TIME	:	15.803 %
% TRUNK 2 ACTIVE TIME	:	0.808 %
% TOTAL ACTIVE TIME	:	17.612 %

CONTROL BYTES TRANSMITTED - TRUNK 1	:	4.73957E+00 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1	:	5.59280E+00 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2	:	3.7076E-01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2	:	1.04020E-01 MBYTES
TOTAL BYTES TRANSMITTED	:	1.0E155E+01 MBYTES
TOTAL OFFERED LOAD	:	6.39400E+00 MBYTES

REP	SOURCE	TIME	WAITING	TIME IN COLLISIONS	AVG MESSAGE DELAY	ASORT COUNT	COUNT
1	1	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
1	1	0.0115	0.0000	5.5E-05	8.4E-04	12	0
1	1	1.1943	0.0004	7.9E-07	6.5E-04	9	0
1	1	0.3879	0.0000	7.9E-07	6.6E-04	0	0
1	1	0.0033	0.0000	0.0E+00	0.0E+00	2078	2
3	1	0.0034	0.0000	0.0E+00	0.0E+00	61	130
3	2	1.1529	0.0000	0.0E+00	9.7E-04	47	15
3	3	0.0342	0.0065	1.5E-06	9.5E-04	23	24
3	4	0.0135	0.0245	5.5E-07	7.2E-04	23	21
4	1	0.0171	0.0003	2.6E-02	2.0E-03	922	88
4	2	0.0229	0.0216	1.6E-05	8.1E-04	43	39
4	3	0.4013	0.0543	7.5E-03	6.8E-04	23	54
4	4	0.0333	0.0022	1.1E-06	3.2E-04	0	0
4	5	0.0245	0.0000	2.5E-03	0.0000	0	0
5	1	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
5	2	0.0115	0.0000	5.5E-05	8.4E-04	12	0
5	3	1.1943	0.0004	7.9E-07	6.5E-04	9	0
5	4	0.3879	0.0000	7.9E-07	6.6E-04	0	0
5	5	0.0033	0.0000	0.0E+00	0.0E+00	2078	2
5	6	0.0034	0.0000	0.0E+00	0.0E+00	61	130
5	7	1.1529	0.0000	0.0E+00	9.7E-04	47	15
5	8	0.0342	0.0065	1.5E-06	9.5E-04	23	24
5	9	0.0135	0.0245	5.5E-07	7.2E-04	23	21
5	10	0.0171	0.0003	2.6E-02	2.0E-03	922	88
5	11	0.0229	0.0216	1.6E-05	8.1E-04	43	39
5	12	0.4013	0.0543	7.5E-03	6.8E-04	23	54
5	13	0.0333	0.0022	1.1E-06	3.2E-04	0	0
5	14	0.0245	0.0000	2.5E-03	0.0000	0	0
5	15	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
5	16	0.0115	0.0000	5.5E-05	8.4E-04	12	0
5	17	1.1943	0.0004	7.9E-07	6.5E-04	9	0
5	18	0.3879	0.0000	7.9E-07	6.6E-04	0	0
5	19	0.0033	0.0000	0.0E+00	0.0E+00	2078	2
5	20	0.0034	0.0000	0.0E+00	0.0E+00	61	130
5	21	1.1529	0.0000	0.0E+00	9.7E-04	47	15
5	22	0.0342	0.0065	1.5E-06	9.5E-04	23	24
5	23	0.0135	0.0245	5.5E-07	7.2E-04	23	21
5	24	0.0171	0.0003	2.6E-02	2.0E-03	922	88
5	25	0.0229	0.0216	1.6E-05	8.1E-04	43	39
5	26	0.4013	0.0543	7.5E-03	6.8E-04	23	54
5	27	0.0333	0.0022	1.1E-06	3.2E-04	0	0
5	28	0.0245	0.0000	2.5E-03	0.0000	0	0
5	29	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
5	30	0.0115	0.0000	5.5E-05	8.4E-04	12	0
5	31	1.1943	0.0004	7.9E-07	6.5E-04	9	0
5	32	0.3879	0.0000	7.9E-07	6.6E-04	0	0
5	33	0.0033	0.0000	0.0E+00	0.0E+00	2078	2
5	34	0.0034	0.0000	0.0E+00	0.0E+00	61	130
5	35	1.1529	0.0000	0.0E+00	9.7E-04	47	15
5	36	0.0342	0.0065	1.5E-06	9.5E-04	23	24
5	37	0.0135	0.0245	5.5E-07	7.2E-04	23	21
5	38	0.0171	0.0003	2.6E-02	2.0E-03	922	88
5	39	0.0229	0.0216	1.6E-05	8.1E-04	43	39
5	40	0.4013	0.0543	7.5E-03	6.8E-04	23	54
5	41	0.0333	0.0022	1.1E-06	3.2E-04	0	0
5	42	0.0245	0.0000	2.5E-03	0.0000	0	0
5	43	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
5	44	0.0115	0.0000	5.5E-05	8.4E-04	12	0
5	45	1.1943	0.0004	7.9E-07	6.5E-04	9	0
5	46	0.3879	0.0000	7.9E-07	6.6E-04	0	0
5	47	0.0033	0.0000	0.0E+00	0.0E+00	2078	2
5	48	0.0034	0.0000	0.0E+00	0.0E+00	61	130
5	49	1.1529	0.0000	0.0E+00	9.7E-04	47	15
5	50	0.0342	0.0065	1.5E-06	9.5E-04	23	24
5	51	0.0135	0.0245	5.5E-07	7.2E-04	23	21
5	52	0.0171	0.0003	2.6E-02	2.0E-03	922	88
5	53	0.0229	0.0216	1.6E-05	8.1E-04	43	39
5	54	0.4013	0.0543	7.5E-03	6.8E-04	23	54
5	55	0.0333	0.0022	1.1E-06	3.2E-04	0	0
5	56	0.0245	0.0000	2.5E-03	0.0000	0	0
5	57	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
5	58	0.0115	0.0000	5.5E-05	8.4E-04	12	0
5	59	1.1943	0.0004	7.9E-07	6.5E-04	9	0
5	60	0.3879	0.0000	7.9E-07	6.6E-04	0	0
5	61	0.0033	0.0000	0.0E+00	0.0E+00	2078	2
5	62	0.0034	0.0000	0.0E+00	0.0E+00	61	130
5	63	1.1529	0.0000	0.0E+00	9.7E-04	47	15
5	64	0.0342	0.0065	1.5E-06	9.5E-04	23	24
5	65	0.0135	0.0245	5.5E-07	7.2E-04	23	21
5	66	0.0171	0.0003	2.6E-02	2.0E-03	922	88
5	67	0.0229	0.0216	1.6E-05	8.1E-04	43	39
5	68	0.4013	0.0543	7.5E-03	6.8E-04	23	54
5	69	0.0333	0.0022	1.1E-06	3.2E-04	0	0
5	70	0.0245	0.0000	2.5E-03	0.0000	0	0
5	71	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
5	72	0.0115	0.0000	5.5E-05	8.4E-04	12	0
5	73	1.1943	0.0004	7.9E-07	6.5E-04	9	0
5	74	0.3879	0.0000	7.9E-07	6.6E-04	0	0
5	75	0.0033	0.0000	0.0E+00	0.0E+00	2078	2
5	76	0.0034	0.0000	0.0E+00	0.0E+00	61	130
5	77	1.1529	0.0000	0.0E+00	9.7E-04	47	15
5	78	0.0342	0.0065	1.5E-06	9.5E-04	23	24
5	79	0.0135	0.0245	5.5E-07	7.2E-04	23	21
5	80	0.0171	0.0003	2.6E-02	2.0E-03	922	88
5	81	0.0229	0.0216	1.6E-05	8.1E-04	43	39
5	82	0.4013	0.0543	7.5E-03	6.8E-04	23	54
5	83	0.0333	0.0022	1.1E-06	3.2E-04	0	0
5	84	0.0245	0.0000	2.5E-03	0.0000	0	0
5	85	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
5	86	0.0115	0.0000	5.5E-05	8.4E-04	12	0
5	87	1.1943	0.0004	7.9E-07	6.5E-04	9	0
5	88	0.3879	0.0000	7.9E-07	6.6E-04	0	0
5	89	0.0033	0.0000	0.0E+00	0.0E+00	2078	2
5	90	0.0034	0.0000	0.0E+00	0.0E+00	61	130
5	91	1.1529	0.0000	0.0E+00	9.7E-04	47	15
5	92	0.0342	0.0065	1.5E-06	9.5E-04	23	24
5	93	0.0135	0.0245	5.5E-07	7.2E-04	23	21
5	94	0.0171	0.0003	2.6E-02	2.0E-03	922	88
5	95	0.0229	0.0216	1.6E-05	8.1E-04	43	39
5	96	0.4013	0.0543	7.5E-03	6.8E-04	23	54
5	97	0.0333	0.0022	1.1E-06	3.2E-04	0	0
5	98	0.0245	0.0000	2.5E-03	0.0000	0	0
5	99	0.0700	0.0000	1.5E-05	7.5E-04	2078	211
5	100	0.0115	0.0000	5.5E-05	8.4E-04	12	0

ORIGINAL PAGE IS  
OF POOR QUALITY

\*\*\* END-OF-RUN NETWORK STATISTICS \*\*\*

CURRENT TIME : 1.0000 SECS

SUCCESSFUL SEQUENCE TRANSMISSIONS	:	343
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1	:	329
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2	:	14
COLLISIONS (FRAMES)	:	14
WAITS (FRAMES)	:	9.3E
TOTAL ATTEMPTS (SEQUENCES)	:	346
TOTAL ADVERTS	:	2
ATTEMPTED TRUNK TRANSMISSIONS	:	461
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS	:	2

TRUNK 1	ACTIVE TIME	:	0.1658959	SECS
TRUNK 2	ACTIVE TIME	:	0.0118461	SECS
TOTAL	TRUNK ACTIVE TIME	:	0.1777421	SECS
%	TRUNK 1 ACTIVE TIME	:	16.550	%
%	TRUNK 2 ACTIVE TIME	:	1.195	%
%	TOTAL ACTIVE TIME	:	17.745	%

CONTROL BYTES TRANSMITTED	-	TRUNK 1	:	4.51630E-01	MBYTES
DATA BYTES TRANSMITTED	-	TRUNK 1	:	5.16036E-01	MBYTES
CONTROL BYTES TRANSMITTED	-	TRUNK 2	:	6.15253E-02	MBYTES
DATA BYTES TRANSMITTED	-	TRUNK 2	:	7.46940E-03	MBYTES
TOTAL BYTES TRANSMITTED			:	1.09111E+00	MBYTES
TOTAL OFFERED LOAD					
			:	6.19640E-01	MBYTES

TOTAL REFUSED LOGS

## DEVICE ACTIVITY SUMMARIES (SECOND)

[illegible]

(SECONDS)

ADP	DEV	SOURCE	TIME	TIME	TIME IN	ABORT	TRANSMISSION	RECEPTION	WAIT	COLLISION
#	#	#	ACTIVE	WAITING	COLLISIONS	DELAY	COUNT	COUNT	COUNT	COUNT
1	1	1	0.0073	0.0000	1.6E-06	8.1E-04	0	19	0	2
111										
2	1	1	0.1190	0.0003	5.3E-06	8.3E-04	0	208	7	9
211										
3	1	1	0.0377	0.0002	0.0E+00	6.5E-04	0	1	91	0
311										
3	1	2	0.0000	0.0000	0.0E+00	0.0E+00	0	0	0	0
312										
3	2	1	0.0007	0.0000	0.0E+00	0.0E+00	0	0	0	0
321										
3	3	1	0.1152	0.0000	0.0E+00	0.0E+00	0	0	208	0
331										
3	4	1	0.0025	0.0013	0.0E+00	6.8E-04	0	6	1	28
341										
4	1	1	0.0012	0.0021	2.6E-08	4.3E-03	0	4	0	42
411										
4	2	1	0.0019	0.0000	2.6E-08	9.8E-04	0	2	2	1
421										
4	3	1	0.0018	0.0188	0.0E+00	6.4E-04	0	2	1	399
431										
4	4	1	0.0356	0.0164	2.8E-05	7.9E-04	0	91	8	322
441										
4	4	2	0.0074	0.0015	0.0E+00	6.5E-04	0	4	2	27
442										
5	1	1	0.0023	0.0000	2.5E-08	1.5E-03	0	2	4	1

ORIGINAL PAGE IS  
OF POOR QUALITY

511

521

522

523

524

75



\*\*\*\*\*  
 NETWORK DESCRIPTION  
 ADAPTER # 1  
 \*\*\*\*\*

\*\*\*\*\*  
 ADAPTER # 1:  
 \*\*\*\*\*

PRIORITY DELAY ON TRUNK 1 : 0.0000077 SEC  
 FIXED DELAY: 0.0000049 SEC  
 TOTAL DELAY ON TRUNK 1 : 0.0000166 SEC  
 ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--11

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 111

DEVICE NUMBER 111

SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES

TRUNK TRANSMISSION INTERVAL: 0.0500 SEC

DATA BLOCK COUNT : 4.892812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:111

RECEIVER ID: 211

PROBABILITY: 1.0E+00

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

\*\*\*\*\*  
 NETWORK DESCRIPTION  
 ADAPTER # 2  
 \*\*\*\*\*

\*\*\*\*\*  
 ADAPTER # 2:  
 \*\*\*\*\*

PRIORITY DELAY ON TRUNK 1 : 0.0000049 SEC

ORIGINAL PAGE IS  
OF POOR QUALITY

FIXED DELAY: 0.000000SEC  
TOTAL DELAY ON TRUNK 1: 0.0000166SECS  
ADAPTER RETRY COUNT: 64

DEVICE 1 STATUS: CLOSED--21  
I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
LOAD TIME: 0.0000002 SEC  
NUMBER OF DATA SOURCES: 1  
211

DEVICE NUMBER 211  
BUFFER SIZE: 2.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 500000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0040 SEC  
DATA BLOCK COUNT: 9.76562500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 211  
RECEIVER ID: 331  
PROBABILITY: 1.0E+00

DEVICE 2 STATUS: OPEN  
DEVICE 3 STATUS: OPEN  
DEVICE 4 STATUS: OPEN

\*\*\*\*\*  
\*\*\*\*\*  
\*\*\*\*\*

NETWORK DESCRIPTION  
ADAPTER # 5

\*\*\*\*\*  
\*\*\*\*\*  
\*\*\*\*\*

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 1: 0.0000005 SEC  
FIXED DELAY: 0.0000049SEC  
TOTAL DELAY ON TRUNK 1: 0.0000166SECS  
ADAPTER RETRY COUNT: 64

DEVICE 1 STATUS: CLOSED--31  
I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000000 SEC  
NUMBER OF DATA SOURCES: 42  
311

DEVICE NUMBER 311  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 1300.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.7692 SEC  
DATA BLOCK COUNT: 4.322812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:311  
RECEIVER ID: 441

312

DEVICE NUMBER 312  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 2 DATA GENERATION RATE: 1000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 1.0000 SEC  
DATA BLOCK COUNT: 4.882812500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:312  
RECEIVER ID: 511

DEVICE 2 STATUS: CLOSED--32

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1

321

DEVICE NUMBER 321  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 10.0000 SEC  
DATA BLOCK COUNT: 4.892812500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:321  
RECEIVER ID: 111

DEVICE 3 STATUS: CLOSED--33

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1

331

DEVICE NUMBER 331  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 10.0000 SEC  
DATA BLOCK COUNT: 4.882812500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:331  
RECEIVER ID: 211

DEVICE 4 STATUS: CLOSED--34

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1

341

DEVICE NUMBER 341  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 6250.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.1600 SEC  
DATA BLOCK COUNT: 4.882812500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:341  
RECEIVER ID: 441

ORIGINAL PAGE IS  
OF POOR QUALITY

# NETWORK DESCRIPTION ADAPTER # 4

ADAPTER # 4:

PRIORITY DELAY ON TRUNK 1 : 0.0000025 SEC  
FIXED DELAY: 0.0000049 SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000166 SEC  
ADAPTER RETRY COUNT : 64

PRIORITY DELAY ON TRUNK 2 : 0.0000005 SEC  
FIXED DELAY: 0.0000141 SEC  
TOTAL DELAY ON TRUNK 2 : 0.0000435 SEC

DEVICE 1 STATUS: CLOSED--41

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
411

DEVICE NUMBER 411  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 1 DATA GENERATION RATE: 2400.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.2063 SEC  
DATA BLOCK COUNT : 2.641406250E+01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:411  
RECEIVER ID: 411  
PROBABILITY: 1.0E+00

DEVICE 2 STATUS: CLOSED--42

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 1  
421

DEVICE NUMBER 421  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
DATA BLOCK COUNT : 2.641406250E+01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:421  
RECEIVER ID: 421  
PROBABILITY: 2.0E-01  
RECEIVER ID: 411  
PROBABILITY: 3.0E-01  
RECEIVER ID: 421  
PROBABILITY: 1.0E-01  
RECEIVER ID: 411  
PROBABILITY: 3.0E-01

DEVICE 3 STATUS: CLOSED--43

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
431

ORIGINAL PAGE IS  
OF POOR QUALITY

DEVICE NUMBER 431  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
 DATA BLOCK COUNT: 2.441406250E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:431  
 RECEIVER ID: 532  
 PROBABILITY: 1.0E+00

DEVICE 4 STATUS: CLOSED--44

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
 LOAD TIME: 0.0000004 SEC  
 NUMBER OF DATA SOURCES: 2  
 441

DEVICE NUMBER 441  
 BUFFER SIZE: 1.0E+03 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 100000.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.0100 SEC  
 DATA BLOCK COUNT: 4.882312500E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:441  
 RECEIVER ID: 511  
 PROBABILITY: 1.0E+00

442

DEVICE NUMBER 442  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 2 DATA GENERATION RATE: 1200.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
 DATA BLOCK COUNT: 2.441406250E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:442  
 RECEIVER ID: 511  
 PROBABILITY: 1.0E+00

# NETWORK DESCRIPTION ADAPTER # 5

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 2: 0.00000021SECS  
 FIXED DELAY ON TRUNK 2: 0.00001157CS  
 TOTAL DELAY ON TRUNK 2: 0.00000355SECS  
 ADAPTER REFILL COUNT: 64

DEVICE 1 STATUS: CLOSED--51

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
 LOAD TIME: 0.0000004 SEC  
 NUMBER OF DATA SOURCES: 1

ORIGINAL PAGE IS  
OF POOR QUALITY

511  
DEVICE NUMBER 511  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 511  
RECEIVER ID: 211  
PROBABILITY: 3.0E-01  
RECEIVER ID: 441  
PROBABILITY: 4.0E-01  
RECEIVER ID: 421  
PROBABILITY: 3.0E-01

DEVICE 2 STATUS : CLOSED--52  
I/O BUS TRANSFER RATE: 30000.00 BYTES/SEC  
LOAD TIME: 0.0000034 SEC  
NUMBER OF DATA SOURCES: 2

521  
DEVICE NUMBER 521  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 521  
RECEIVER ID: 341  
PROBABILITY: 3.0E-01  
RECEIVER ID: 441  
PROBABILITY: 4.0E-01  
RECEIVER ID: 442  
PROBABILITY: 3.0E-01

522  
DEVICE NUMBER 522  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 2 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 522  
RECEIVER ID: 431  
PROBABILITY: 1.0E+00

DEVICE 3 STATUS : OPEN

DEVICE 4 STATUS : OPEN

NETWORK DESCRIPTION  
ADAPTER # 5

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 2: 0.0000157SECS  
FIXED DELAY ON TRUNK 2: 0.0000141SECS  
TOTAL DELAY ON TRUNK 2: 0.0000435SECS  
ADAPTER RETRY COUNT: 44

DEVICE 1 STATUS : CLOSED--51  
I/O BUS TRANSFER RATE: 1200.00 BYTES/SEC  
LOAD TIME: 0.0001000 SEC

NUMBER OF DATA SOURCES: 1

511

DEVICE NUMBER 511

SUPPER SIZE: 5.0E+02BYTES

SOURCE 1 DATA GENERATION RATE: 1250.00BYTES

TRUNK TRANSMISSION INTERVAL: 0.4000SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 511

RECEIVER ID: 221

PROBABILITY: 5.0E-01

RECEIVER ID: 442

PROBABILITY: 5.0E-01

DEVICE 2 STATUS : OPEN

DEVICE 3 STATUS : OPEN

DEVICE 4 STATUS : OPEN

**SECTION 1.4****ANTICIPATED HOSC/CREY CONFIGURATION****UNDER EXTREME LOADING**



\*\*\* END OF RUN NETWORK STATISTICS \*\*\*

CURRENT TIME :	5.0000 SECS	
SUCCESSFUL SEQUENCE TRANSMISSIONS		: 2494
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1		: 2412
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2		: 82
COLLISIONS (FRAMES)		: 2591
WAITS (FRAMES)		: 1.8E+04
TOTAL ATTEMPTS (SEQUENCES)		: 2736
TOTAL ABORTS		: 238
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS		: 2024
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS		: 15
TRUNK 1 ACTIVE TIME		: 2.8190647 SECS
TRUNK 2 ACTIVE TIME		: 0.1112463 SECS
TOTAL TRUNK ACTIVE TIME		: 2.9303110 SECS
% TRUNK 1 ACTIVE TIME		: 56.381 %
% TRUNK 2 ACTIVE TIME		: 2.225 %
% TOTAL ACTIVE TIME		: 58.606 %
CONTROL BYTES TRANSMITTED - TRUNK 1		: 1.43685E+01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1		: 2.92337E+00 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2		: 5.74847E-01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2		: 4.77480E-02 MBYTES
TOTAL BYTES TRANSMITTED		: 1.79144E+01 MBYTES
TOTAL OFFERED LOAD		: 9.79176E+00 MBYTES

DEVICE ACTIVITY SUMMARIES

(SECONDS)

ADP DEV SOURCE #	TIME WAITING	TIME IN COLLISIONS	AVG MESSAGE DELAY	ABORT COUNT	TRANSMISSION COUNT	RECEPTION COUNT	WAIT COUNT	COLLISION COUNT
111	0.0000	2.4E-04	1.0E-02	0	83	0	0	171
211	0.0016	1.3E-04	9.1E-03	50	365	87	33	173
311	0.1027	7.7E-05	2.0E-03	78	1747	0	2078	170
312	0.0000	2.6E-07	4.4E-03	1	3	0	0	1
321	0.0000	0.0E+00	0.0E+00	0	0	4	0	0
331	0.0361	4.5E-06	4.3E-03	2	27	8	1752	13
411	0.0000	0.0E+00	0.0E+00	0	0	536	0	0
421	0.0026	6.5E-06	0.0E+00	17	0	0	52	19
511	0.2412	4.2E-05	6.4E-04	0	22	0	4757	8
521	0.1020	2.4E-04	3.7E-03	1	10	10	3285	33
531	0.1224	5.1E-04	3.4E-03	0	11	9	2465	33
541	0.0948	7.7E-03	1.4E-02	76	171	1776	1905	1002
542	0.0305	5.4E-03	1.5E-02	6	17	20	600	729
511	0.0154	1.6E-03	7.6E-03	1	10	28	309	201
621	0.0000	2.5E-04	5.2E-03	2	9	0	0	33
622	0.0380	1.9E-03	1.5E-02	3	9	11	778	245
711	0.0000	1.4E-02	2.1E-02	1	10	5	0	1791

\*\*\* END OF RUN NETWORK STATISTICS \*\*\*

CURRENT TIME :	1.0000 SECS	
SUCCESSFUL SEQUENCE TRANSMISSIONS		: 531
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 1		: 518
SUCCESSFUL SEQUENCE TRANSMISSIONS-TRUNK 2		: 13
COLLISIONS (FRAMES)		: 549
LAITS (FRAMES)		: 5.7E+03
TOTAL ATTEMPTS (SEQUENCES)		: 581
TOTAL ABORTS		: 44
ATTEMPTED TRUNK-TRUNK TRANSMISSIONS		: 974
SUCCESSFUL TRUNK-TRUNK TRANSMISSIONS		: 1
TRUNK 1 ACTIVE TIME		: 0.5513506 SECS
TRUNK 2 ACTIVE TIME		: 0.0308024 SECS
TOTAL TRUNK ACTIVE TIME		: 0.5821530 SECS
X TRUNK 1 ACTIVE TIME		: 55.135 %
X TRUNK 2 ACTIVE TIME		: 3.080 %
X TOTAL ACTIVE TIME		: 58.215 %
CONTROL BYTES TRANSMITTED - TRUNK 1		: 2.75305E+00 MBYTES
DATA BYTES TRANSMITTED - TRUNK 1		: 6.30152E-01 MBYTES
CONTROL BYTES TRANSMITTED - TRUNK 2		: 1.73235E-01 MBYTES
DATA BYTES TRANSMITTED - TRUNK 2		: 7.33200E-03 MBYTES
TOTAL BYTES TRANSMITTED		: 3.56377E+00 MBYTES
TOTAL OFFERED LOAD		: 1.95835E+00 MBYTES

DEVICE ACTIVITY SUMMARIES

(SECONDS)

ADP DEV	SOURCE	TIME	TIME	TIME IN	AVG MESSAGE	ABORT	TRANSMISSION	RECEPTION	WAIT	COLLISION
#	#	#	WAITING	COLLISIONS	DELAY	COUNT	COUNT	COUNT	COUNT	COUNT
1	1	1	0.0104	4.8E-05	8.4E-03	0	16	0	0	34
111			0.0000							
2	1	1	0.1259	3.0E-05	7.8E-03	10	80	17	0	46
211			0.0000							
3	1	1	0.2765	2.9E-05	1.8E-03	15	378	0	325	63
311			0.0160							
3	1	2	0.0000	0.0E+00	0.0E+00	0	0	0	0	0
312			0.0000							
3	2	1	0.0003	0.0E+00	0.0E+00	0	0	1	0	0
321			0.0000							
3	3	1	0.0067	5.3E-07	3.7E-03	0	5	0	440	2
331			0.0215							
4	1	1	0.2473	0.0E+00	0.0E+00	0	0	117	0	0
411			0.0000							
4	2	1	0.0215	2.2E-06	0.0E+00	3	0	0	5	7
421			0.0002							
5	1	1	0.0011	4.0E-05	6.6E-04	0	4	0	1160	6
511			0.0586							
5	2	1	0.0030	0.0E+00	6.3E-04	0	2	2	1109	0
521			0.0545							
5	3	1	0.0117	4.9E-04	1.6E-02	0	2	1	480	92
531			0.0236							
5	4	1	0.4009	5.6E-04	1.3E-02	12	37	384	1076	109
541			0.0537							
5	4	2	0.0151	1.4E-04	1.2E-02	1	2	1	0	23
542			0.0000							
6	1	1	0.0031	1.3E-03	3.8E-02	1	1	5	309	158
611			0.0154							
6	2	1	0.0057	0.0E+00	1.6E-02	1	1	0	0	0
621			0.0000							
6	2	2	0.0117	1.0E-03	7.1E-02	1	1	2	773	128
622			0.0380							
7	1	1	0.0051	3.1E-03	3.7E-02	0	2	1	0	326
711			0.0000							

ORIGINAL PAGE IS  
OF POOR QUALITY

\*\*\*\*\*

NETWORK DESCRIPTION  
ADAPTER # 1

\*\*\*\*\*

ADAPTER # 1:

PRIORITY DELAY ON TRUNK 1 : 0.0000077 SEC  
FIXED DELAY : 0.0000049 SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000204 SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--11

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
111

DEVICE NUMBER 111  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0500 SEC  
DATA BLOCK COUNT : 4.882312500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:111  
RECEIVER ID: 211

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

\*\*\*\*\*

NETWORK DESCRIPTION  
ADAPTER # 2

\*\*\*\*\*

ADAPTER # 2:

PRIORITY DELAY ON TRUNK 1 : 0.0000049 SEC

ORIGINAL PAGE IS  
OF POOR QUALITY

FIXED DELAY: 0.0000049SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000204SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--21

I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
LOAD TIME: 0.0000002 SEC  
NUMBER OF DATA SOURCES: 1  
211

DEVICE NUMBER 211  
BUFFER SIZE: 2.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 500000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0040 SEC  
DATA BLOCK COUNT : 9.765625000E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:211  
RECEIVER ID: (1)

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

# NETWORK DESCRIPTION ADAPTER # 3

ADAPTER # 3:

PRIORITY DELAY ON TRUNK 1 : 0.0000005 SEC  
FIXED DELAY: 0.0000049SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000204SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--31

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.0000000 SEC  
NUMBER OF DATA SOURCES: 2  
311

DEVICE NUMBER 311  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 1300000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0008 SEC  
DATA BLOCK COUNT : 4.862812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:311  
RECEIVER ID: 541

312

DEVICE NUMBER 312  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 2 DATA GENERATION RATE: 1000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 1.0000 SEC  
DATA BLOCK COUNT : 4.882812500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:312  
RECEIVER ID: 711  
PROBABILITY: 1.0E+00

DEVICE 2 STATUS: CLOSED--32

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1

321

DEVICE NUMBER 321  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 10.0000 SEC  
DATA BLOCK COUNT : 4.882812500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:321  
RECEIVER ID: 111  
PROBABILITY: 1.0E+00

DEVICE 3 STATUS: CLOSED--33

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1

331

DEVICE NUMBER 331  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 6250.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.1600 SEC  
DATA BLOCK COUNT : 4.882812500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:331  
RECEIVER ID: 541  
PROBABILITY: 1.0E+00

DEVICE 4 STATUS: OPEN

NETWORK DESCRIPTION  
ADAPTER # 4

ADAPTER # 4:

ORIGINAL PAGE IS  
OF POOR QUALITY

PRIORITY DELAY ON TRUNK 1 : 0.0000115 SEC  
FIXED DELAY: 0.0000049 SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000344 SEC  
ADAPTER RETRY COUNT : 54

DEVICE 1 STATUS: CLOSED--41

I/O BUS TRANSFER RATE: 330000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
411

DEVICE NUMBER 411  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 10.0000 SEC  
DATA BLOCK COUNT : 4.882312500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:411  
RECEIVER ID: 211  
RECEIVER ID: 521

DEVICE 2 STATUS: CLOSED--42

I/O BUS TRANSFER RATE: 330000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
421

DEVICE NUMBER 421  
BUFFER SIZE: 2.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.1000 SEC  
DATA BLOCK COUNT : 9.765625000E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:421  
RECEIVER ID: 411

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

\*\*\*\*\*

NETWORK DESCRIPTION  
ADAPTER # 5

\*\*\*\*\*

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 1 : 0.0000025 SEC



FIXED DELAY: 0.0000049SEC  
 TOTAL DELAY ON TRUNK 1: 0.0000204SECS  
 ADAPTER RETRY COUNT: 64

PRIORITY DELAY ON TRUNK 2: 0.0000005SEC  
 FIXED DELAY: 0.0000141SEC  
 TOTAL DELAY ON TRUNK 2: 0.0000435SEC

DEVICE 1 STATUS: CLOSED--51

I/O BUS TRANSFER RATE: 330000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 511

DEVICE NUMBER 511  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 2400.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.2083 SEC  
 DATA BLOCK COUNT: 2.441406250E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 511  
 RECEIVER ID: 511  
 PROBABILITY: 1.0E+00

DEVICE 2 STATUS: CLOSED--52

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
 LOAD TIME: 0.000004 SEC  
 NUMBER OF DATA SOURCES: 1  
 521

DEVICE NUMBER 521  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
 DATA BLOCK COUNT: 2.441406250E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 521  
 RECEIVER ID: 321  
 PROBABILITY: 2.0E-01  
 RECEIVER ID: 511  
 PROBABILITY: 3.0E-01  
 RECEIVER ID: 621  
 PROBABILITY: 3.0E-01  
 RECEIVER ID: 711  
 PROBABILITY: 2.0E-01

DEVICE 3 STATUS: CLOSED--53

I/O BUS TRANSFER RATE: 330000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 531

DEVICE NUMBER 531  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
 DATA BLOCK COUNT: 2.441406250E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 531  
 RECEIVER ID: 522  
 PROBABILITY: 1.0E+00

DEVICE 4 STATUS: CLOSED--54

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
 LOAD TIME: 0.000004 SEC  
 NUMBER OF DATA SOURCES: 2  
 541

ORIGINAL PAGE IS  
OF POOR QUALITY

DEVICE NUMBER 541  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0100 SEC  
DATA BLOCK COUNT: 4.982812500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 541  
RECEIVER ID: 411  
PROBABILITY: 1.0E+00

542  
DEVICE NUMBER 542  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 2 DATA GENERATION RATE: 1200.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
DATA BLOCK COUNT: 2.441406250E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 542  
RECEIVER ID: 711  
PROBABILITY: 1.0E+00

\*\*\*\*\*  
\*\*\*\*\*

# NETWORK DESCRIPTION ADAPTER # 6

\*\*\*\*\*  
\*\*\*\*\*

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 2: 0.0000021SECS  
FIXED DELAY ON TRUNK 2: 0.0300141SECS  
TOTAL DELAY ON TRUNK 2: 0.0000435SECS  
ADAPTER RETRY COUNT: 64

DEVICE 1 STATUS: CLOSED--61  
I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 1

511  
DEVICE NUMBER 611  
BUFFER SIZE: 5.0E+029BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 611  
RECEIVER ID: 211  
PROBABILITY: 3.0E-01  
RECEIVER ID: 541  
PROBABILITY: 4.0E-01  
RECEIVER ID: 521  
PROBABILITY: 3.0E-01

DEVICE 2 STATUS: CLOSED--62  
I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC

C-2

ORIGINAL PAGE IS  
OF POOR QUALITY

NUMBER OF DATA SOURCES: 2

621

DEVICE NUMBER 621  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 621

RECEIVER ID: 331.  
PROBABILITY: 3.0E-01  
RECEIVER ID: 541  
PROBABILITY: 4.0E-01  
RECEIVER ID: 542  
PROBABILITY: 3.0E-01

622

DEVICE NUMBER 622  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 2 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4000SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 622

RECEIVER ID: 531  
PROBABILITY: 1.0E+00

DEVICE 3 STATUS : OPEN

DEVICE 4 STATUS : OPEN

NETWORK DESCRIPTION  
ADAPTER # 7

ADAPTER # 7:

PRIORITY DELAY ON TRUNK 2 : 0.0000157SECS  
FIXED DELAY ON TRUNK 2: 0.0000141SECS  
TOTAL DELAY ON TRUNK 2: 0.0000433SECS  
ADAPTER RETRY COUNT : 54

DEVICE 1 STATUS : CLOSED--71

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 1  
711

DEVICE NUMBER 711  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4000SECS

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 711

RECEIVER ID: 521  
PROBABILITY: 5.0E-01  
RECEIVER ID: 542  
PROBABILITY: 5.0E-01

DEVICE 2 STATUS : OPEN

DEVICE 3 STATUS : OPEN

**SECTION 1.5**

**A RERUN OF FIGURE 2.4 WITH REDUCED LOADING**

ORIGINAL PAGE IS  
OF POOR QUALITY

\*\*\*\*\*  
NETWORK DESCRIPTION  
ADAPTER # 1  
\*\*\*\*\*

ADAPTER # 1:

PRIORITY DELAY ON TRUNK 1 : 0.000077 SEC  
FIXED DELAY: 0.000049 SEC  
TOTAL DELAY ON TRUNK 1 : 0.000204 SEC  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--11

I/O BUS TRANSFER RATE: 330000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
111

DEVICE NUMBER 111

BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0500 SEC  
DATA BLOCK COUNT : 4.882912500E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:111  
RECEIVER ID: 211

DEVICE 2 STATUS: OPEN  
DEVICE 3 STATUS: OPEN  
DEVICE 4 STATUS: OPEN

\*\*\*\*\*  
NETWORK DESCRIPTION  
ADAPTER # 2  
\*\*\*\*\*

ADAPTER # 2:

PRIORITY DELAY ON TRUNK 1 : 0.000049 SEC

ORIGINAL PAGE IS  
OF POOR QUALITY

FIXED DELAY: 0.0000049SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000204SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--21

I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
LOAD TIME: 0.0000002 SEC  
NUMBER OF DATA SOURCES: 1  
211

DEVICE NUMBER 211  
BUFFER SIZE: 2.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 500000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0040 SEC  
DATA BLOCK COUNT: 9.765625000E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:211  
RECEIVER ID: 411 PROBABILITY: 1.0E+00

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

\*\*\*\*\*  
NETWORK DESCRIPTION  
ADAPTER # 3  
\*\*\*\*\*

ADAPTER # 3:

PRIORITY DELAY ON TRUNK 1 : 0.0000005 SEC  
FIXED DELAY: 0.0000049SEC  
TOTAL DELAY ON TRUNK 1 : 0.0000204SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--31

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.0000000 SEC  
NUMBER OF DATA SOURCES: 2  
311

DEVICE NUMBER 311  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 1300.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.7692 SEC  
DATA BLOCK COUNT : 4.882812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:311  
RECEIVER ID: 541

PROBABILITY: 1.0E+00

312

DEVICE NUMBER 312  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 2 DATA GENERATION RATE: 1000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 1.0000 SEC  
DATA BLOCK COUNT: 4.882812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:312  
RECEIVER ID: 711

PROBABILITY: 1.0E+00

DEVICE 2 STATUS: CLOSED--32

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1

321

DEVICE NUMBER 321  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 10.0000 SEC  
DATA BLOCK COUNT: 4.882812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:321  
RECEIVER ID: 111

PROBABILITY: 1.0E+00

DEVICE 3 STATUS: CLOSED--33

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1

331

DEVICE NUMBER 331  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 6250.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.1600 SEC  
DATA BLOCK COUNT: 4.882812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:331  
RECEIVER ID: 541

PROBABILITY: 1.0E+00

DEVICE 4 STATUS: OPEN

NETWORK DESCRIPTION  
ADAPTER # 4

ADAPTER # 4:

PRIORITY DELAY ON TRUNK 1 : 0.000115 SEC  
 FIXED DELAY: 0.0000049SEC  
 TOTAL DELAY ON TRUNK 1 : 0.000204SECS  
 ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--41  
 I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 411

DEVICE NUMBER 411  
 BUFFER SIZE: 1.0E+03 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 10.0000 SEC  
 DATA BLOCK COUNT : 4.882812500E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:411  
 RECEIVER ID: 211  
 RECEIVER ID: 521  
 PROBABILITY: 8.0E-01  
 PROBABILITY: 2.0E-01

DEVICE 2 STATUS: CLOSED--42  
 I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 421

DEVICE NUMBER 421  
 BUFFER SIZE: 2.0E+03 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.1000 SEC  
 DATA BLOCK COUNT : 9.765625000E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:421  
 RECEIVER ID: 411  
 PROBABILITY: 1.0E+00

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

\*\*\*\*\*  
 NETWORK DESCRIPTION  
 ADAPTER # 5  
 \*\*\*\*\*

ADAPTER # 5:

PRIORITY DELAY ON TRUNK 1 : 0.0000025 SEC



FIXED DELAY: 0.0000049SEC  
 TOTAL DELAY ON TRUNK 1: 0.00002045SEC  
 ADAPTER RETRY COUNT: 64

PRIORITY DELAY ON TRUNK 2: 0.00000005SEC  
 FIXED DELAY: 0.0000141SEC  
 TOTAL DELAY ON TRUNK 2: 0.0000435SEC

DEVICE 1 STATUS: CLOSED--51

I/O BUS TRANSFER RATE: 330000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 511  
 DEVICE NUMBER: 511  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 2400.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.2083 SEC  
 DATA BLOCK COUNT: 2.441406250E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 511  
 PROBABILITY: 1.0E+00  
 RECEIVER ID: 611

DEVICE 2 STATUS: CLOSED--52

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 521  
 DEVICE NUMBER: 521  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
 DATA BLOCK COUNT: 2.441406250E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 521  
 PROBABILITY: 2.0E-01  
 RECEIVER ID: 321  
 PROBABILITY: 3.0E-01  
 RECEIVER ID: 611  
 PROBABILITY: 3.0E-01  
 RECEIVER ID: 621  
 PROBABILITY: 2.0E-01  
 RECEIVER ID: 711

DEVICE 3 STATUS: CLOSED--53

I/O BUS TRANSFER RATE: 330000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 531  
 DEVICE NUMBER: 531  
 BUFFER SIZE: 5.0E+02 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
 DATA BLOCK COUNT: 2.441406250E-01  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 531  
 PROBABILITY: 1.0E+00  
 RECEIVER ID: 622

DEVICE 4 STATUS: CLOSED--54

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 2  
 541

ORIGINAL PAGE IS  
OF POOR QUALITY

DEVICE NUMBER 541  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100000.00 BYTES  
TRUNK-TRANSMISSION INTERVAL: 0.0100 SEC  
DATA BLOCK COUNT: 4.88281250E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 541  
RECEIVER ID: 411  
PROBABILITY: 1.0E+00

542  
DEVICE NUMBER 542  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 2 DATA GENERATION RATE: 1200.00 BYTES  
TRUNK-TRANSMISSION INTERVAL: 0.4167 SEC  
DATA BLOCK COUNT: 2.441406250E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 542  
RECEIVER ID: 711  
PROBABILITY: 1.0E+00

\*\*\*\*\*

# NETWORK DESCRIPTION ADAPTER # 6

\*\*\*\*\*

## ADAPTER # 6:

PRIORITY DELAY ON TRUNK 2: 0.0000021SECS  
FIXED DELAY ON TRUNK 2: 0.0000141SECS  
TOTAL DELAY ON TRUNK 2: 0.0000355SECS  
ADAPTER RETRY COUNT: 64

DEVICE 1 STATUS: CLOSED--61  
I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 1  
611

DEVICE NUMBER 611  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
TRUNK-TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 611  
RECEIVER ID: 211  
PROBABILITY: 3.0E-01  
RECEIVER ID: 541  
PROBABILITY: 4.0E-01  
RECEIVER ID: 521  
PROBABILITY: 3.0E-01

DEVICE 2 STATUS: CLOSED--62  
I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC

ORIGINAL PAGE IS  
OF POOR QUALITY

NUMBER OF DATA SOURCES: 2  
621  
DEVICE NUMBER 621  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 621  
RECEIVER ID: 331  
PROBABILITY: 3.0E-01  
RECEIVER ID: 541  
PROBABILITY: 4.0E-01  
RECEIVER ID: 542  
PROBABILITY: 3.0E-01  
622  
DEVICE NUMBER 622  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 2 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4000SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 622  
RECEIVER ID: 531  
PROBABILITY: 1.0E+00

DEVICE 3 STATUS : OPEN

DEVICE 4 STATUS : OPEN

\*\*\*\*\*

NETWORK DESCRIPTION  
ADAPTER # 7

\*\*\*\*\*

ADAPTER # 7:

PRIORITY DELAY ON TRUNK 2 : 0.0000157SECS  
FIXED DELAY ON TRUNK 2: 0.0000141SECS  
TOTAL DELAY ON TRUNK 2: 0.0000435SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS : CLOSED--71  
I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 1  
711

DEVICE NUMBER 711  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4000SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 711  
RECEIVER ID: 521  
PROBABILITY: 5.0E-01  
RECEIVER ID: 542  
PROBABILITY: 5.0E-01

DEVICE 2 STATUS : OPEN

DEVICE 3 STATUS : OPEN

**SECTION 1.6****SUGGESTED HOSC/CREY CONFIGURATION FOR EXTREME LOADING**

\*\*\*\*\*  
 NETWORK DESCRIPTION  
 ADAPTER # 1  
 \*\*\*\*\*

\*\*\*\*\*  
 ADAPTER # 1:  
 \*\*\*\*\*

PRIORITY DELAY ON TRUNK 1 : 0.0000109 SEC  
 FIXED DELAY: 0.0000049 SEC  
 TOTAL DELAY ON TRUNK 1 : 0.0000192 SECS  
 ADAPTER RETRY COUNT : 64

\*\*\*\*\*  
 DEVICE 1 STATUS: CLOSED--CSO  
 \*\*\*\*\*

I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
 LOAD TIME: 0.000000 SEC  
 NUMBER OF DATA SOURCES: 1  
 111

DEVICE NUMBER 111  
 BUFFER SIZE: 1.0E+03 BYTES  
 SOURCE # 1 DATA GENERATION RATE: 20000.00 BYTES  
 TRUNK TRANSMISSION INTERVAL: 0.0500 SEC  
 DATA BLOCK COUNT : 4.832312500E-01  
 PROBABILITY: 1.0E+00

\*\*\*\*\*  
 POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:111  
 RECEIVER ID: 211  
 \*\*\*\*\*

DEVICE 2 STATUS: OPEN  
 DEVICE 3 STATUS: OPEN  
 DEVICE 4 STATUS: OPEN

\*\*\*\*\*  
 NETWORK DESCRIPTION  
 ADAPTER # 2  
 \*\*\*\*\*

\*\*\*\*\*  
 ADAPTER # 2:  
 \*\*\*\*\*

PRIORITY DELAY ON TRUNK 1 : 0.0000049 SEC

ORIGINAL PAGE IS  
OF POOR QUALITY

TOTAL DELAY ON TRUNK 1 : 0.00001935SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--UNIVAC  
I/O BUS TRANSFER RATE: 500000.00 BYTES/SEC  
LOAD TIME: 0.0000002 SEC  
NUMBER OF DATA SOURCES: 1  
211

DEVICE NUMBER 211  
BUFFER SIZE: 2.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 500000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0040 SEC  
DATA BLOCK COUNT : 9.75525000E-01  
PROBABILITY: 1.0E+00

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:211  
RECEIVER ID: 411

DEVICE 2 STATUS: OPEN

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

\*\*\*\*\*

# NETWORK DESCRIPTION ADAPTER # 3

\*\*\*\*\*

## ADAPTER # 3:

PRIORITY DELAY ON TRUNK 1 : 0.0000005 SEC  
FIXED DELAY: 0.0000049SEC  
TOTAL DELAY ON TRUNK 1 : 0.00001935SECS  
ADAPTER RETRY COUNT : 64

DEVICE 1 STATUS: CLOSED--SHUTTLE SUPPORT  
I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.0000000 SEC  
NUMBER OF DATA SOURCES: 2  
311

DEVICE NUMBER 311  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 1300.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.7692 SEC  
DATA BLOCK COUNT : 4.682812500E-01

ORIGINAL PAGE IS  
OF POOR QUALITY

PROBABILITY: 1.0E+00  
312  
DEVICE NUMBER 312  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 2 DATA GENERATION RATE: 1000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 1.000 SEC  
DATA CLOCK COUNT: 4.892812500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:312  
RECEIVER ID: 711  
PROBABILITY: 1.0E+00

DEVICE 2 STATUS: CLOSED--REF1 BACKUP  
I/O BUS TRANSFER RATE: 3100000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
321

DEVICE NUMBER 321  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 10.000 SEC  
DATA CLOCK COUNT: 4.892812500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:321  
RECEIVER ID: 111  
PROBABILITY: 1.0E+00

DEVICE 3 STATUS: CLOSED--POCC  
I/O BUS TRANSFER RATE: 3300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
331

DEVICE NUMBER 331  
BUFFER SIZE: 1.0E+03 BYTES  
SOURCE # 1 DATA GENERATION RATE: 6250.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.1600 SEC  
DATA CLOCK COUNT: 4.892812500E-01  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR:331  
RECEIVER ID: 521  
PROBABILITY: 1.0E+00

DEVICE 4 STATUS: OPEN

NETWORK DESCRIPTION  
ADAPTER # 4

ADAPTER # 4:





ORIGINAL PAGE IS  
OF POOR QUALITY

TOTAL DELAY ON TRUNK 1 : 0.00001955SEC  
ADAPTER RETRY COUNT : 54

PRIORITY DELAY ON TRUNK 1 : 0.00000055SEC  
FIXED DELAY : 0.0000141SEC  
TOTAL DELAY ON TRUNK 2 : 0.00005555SEC

DEVICE 1 STATUS: CLOSED--SL MISSION  
I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.000000 SEC  
NUMBER OF DATA SOURCES: 1  
511

DEVICE NUMBER 511  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
DATA BLOCK COUNT: 2.441406250E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 511  
RECEIVER ID: 721  
PROBABILITY: 2.0E-01  
RECEIVER ID: 611  
PROBABILITY: 3.0E-01  
RECEIVER ID: 521  
PROBABILITY: 3.0E-01  
RECEIVER ID: 711  
PROBABILITY: 2.0E-01

DEVICE 2 STATUS: CLOSED--MIPS  
I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 2  
521

DEVICE NUMBER 521  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 1 DATA GENERATION RATE: 100000.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.0050 SEC  
DATA BLOCK COUNT: 2.441406250E-01

POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 521  
RECEIVER ID: 411  
PROBABILITY: 1.0E+00

422  
DEVICE NUMBER 522  
BUFFER SIZE: 5.0E+02 BYTES  
SOURCE # 2 DATA GENERATION RATE: 1200.00 BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167 SEC  
DATA BLOCK COUNT: 2.441406250E-01  
PROBABILITY: 1.0E+00

DEVICE 3 STATUS: OPEN

DEVICE 4 STATUS: OPEN

\*\*\*\*\*

ORIGINAL PAGE IS  
OF POOR QUALITY

# NETWORK DESCRIPTION ADAPTER # 0

## ADAPTER # 0:

PRIORITY DELAY ON TRUNK 0: 0.0000277SECS  
FIXED DELAY ON TRUNK 0: 0.00001415SECS  
TOTAL DELAY ON TRUNK 0: 0.00005593SECS  
ADAPTER RETRY COUNT: 64

## DEVICE 1 STATUS: CLOSED--SSD

I/O BUS TRANSFER RATE: 100000.00 BYTES/SEC  
LOAD TIME: 0.000004 SEC  
NUMBER OF DATA SOURCES: 1

### 611 DEVICE NUMBER 611

BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 611  
PROBABILITY: 3.0E-01  
RECEIVER ID: 211  
PROBABILITY: 4.0E-01  
RECEIVER ID: 511  
PROBABILITY: 3.0E-01

## DEVICE 2 STATUS: CLOSED--ST STIMULUS

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.000004 SEC  
NUMBER OF DATA SOURCES: 2

### 621

DEVICE NUMBER 621  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 621  
PROBABILITY: 3.0E-01  
RECEIVER ID: 331  
PROBABILITY: 4.0E-01  
RECEIVER ID: 521  
PROBABILITY: 3.0E-01

### 622

DEVICE NUMBER 622  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 2 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4000SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 622  
PROBABILITY: 1.0E+00

## DEVICE 3 STATUS: OPEN

## DEVICE 4 STATUS: OPEN

ORIGINAL PAGE IS  
OF POOR QUALITY

\*\*\*\*\*  
NETWORK DESCRIPTION  
ADAPTER # 7  
\*\*\*\*\*

ADAPTER # 7:

PRIORITY DELAY ON TRUNK 2: 0.00001415SEC  
FIXED DELAY ON TRUNK 2: 0.00001415SEC  
TOTAL DELAY ON TRUNK 2: 0.00005555SEC  
ADAPTER BFTPY COUNT: 64

DEVICE 1 STATUS: CLOSED--111

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 1  
711

DEVICE NUMBER 711  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1250.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4000SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 711  
RECEIVER ID: 511  
PROBABILITY: 5.0E-01  
RECEIVER ID: 522  
PROBABILITY: 5.0E-01

DEVICE 2 STATUS: CLOSED--SL SUPPORT

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000004 SEC  
NUMBER OF DATA SOURCES: 1  
721

DEVICE NUMBER 721  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 2400.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.2023SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 721  
RECEIVER ID: 611  
PROBABILITY: 1.0E+00

DEVICE 3 STATUS: CLOSED--ST SUPPORT

I/O BUS TRANSFER RATE: 300000.00 BYTES/SEC  
LOAD TIME: 0.0000000 SEC  
NUMBER OF DATA SOURCES: 1  
731

DEVICE NUMBER 731  
BUFFER SIZE: 5.0E+02BYTES  
SOURCE # 1 DATA GENERATION RATE: 1200.00BYTES  
TRUNK TRANSMISSION INTERVAL: 0.4167SECS  
POSSIBLE RECEIVERS AND THEIR RESPECTIVE PROBABILITIES FOR: 731  
RECEIVER ID: 622  
PROBABILITY: 1.0E+00

DEVICE 4 STATUS: OPEN